


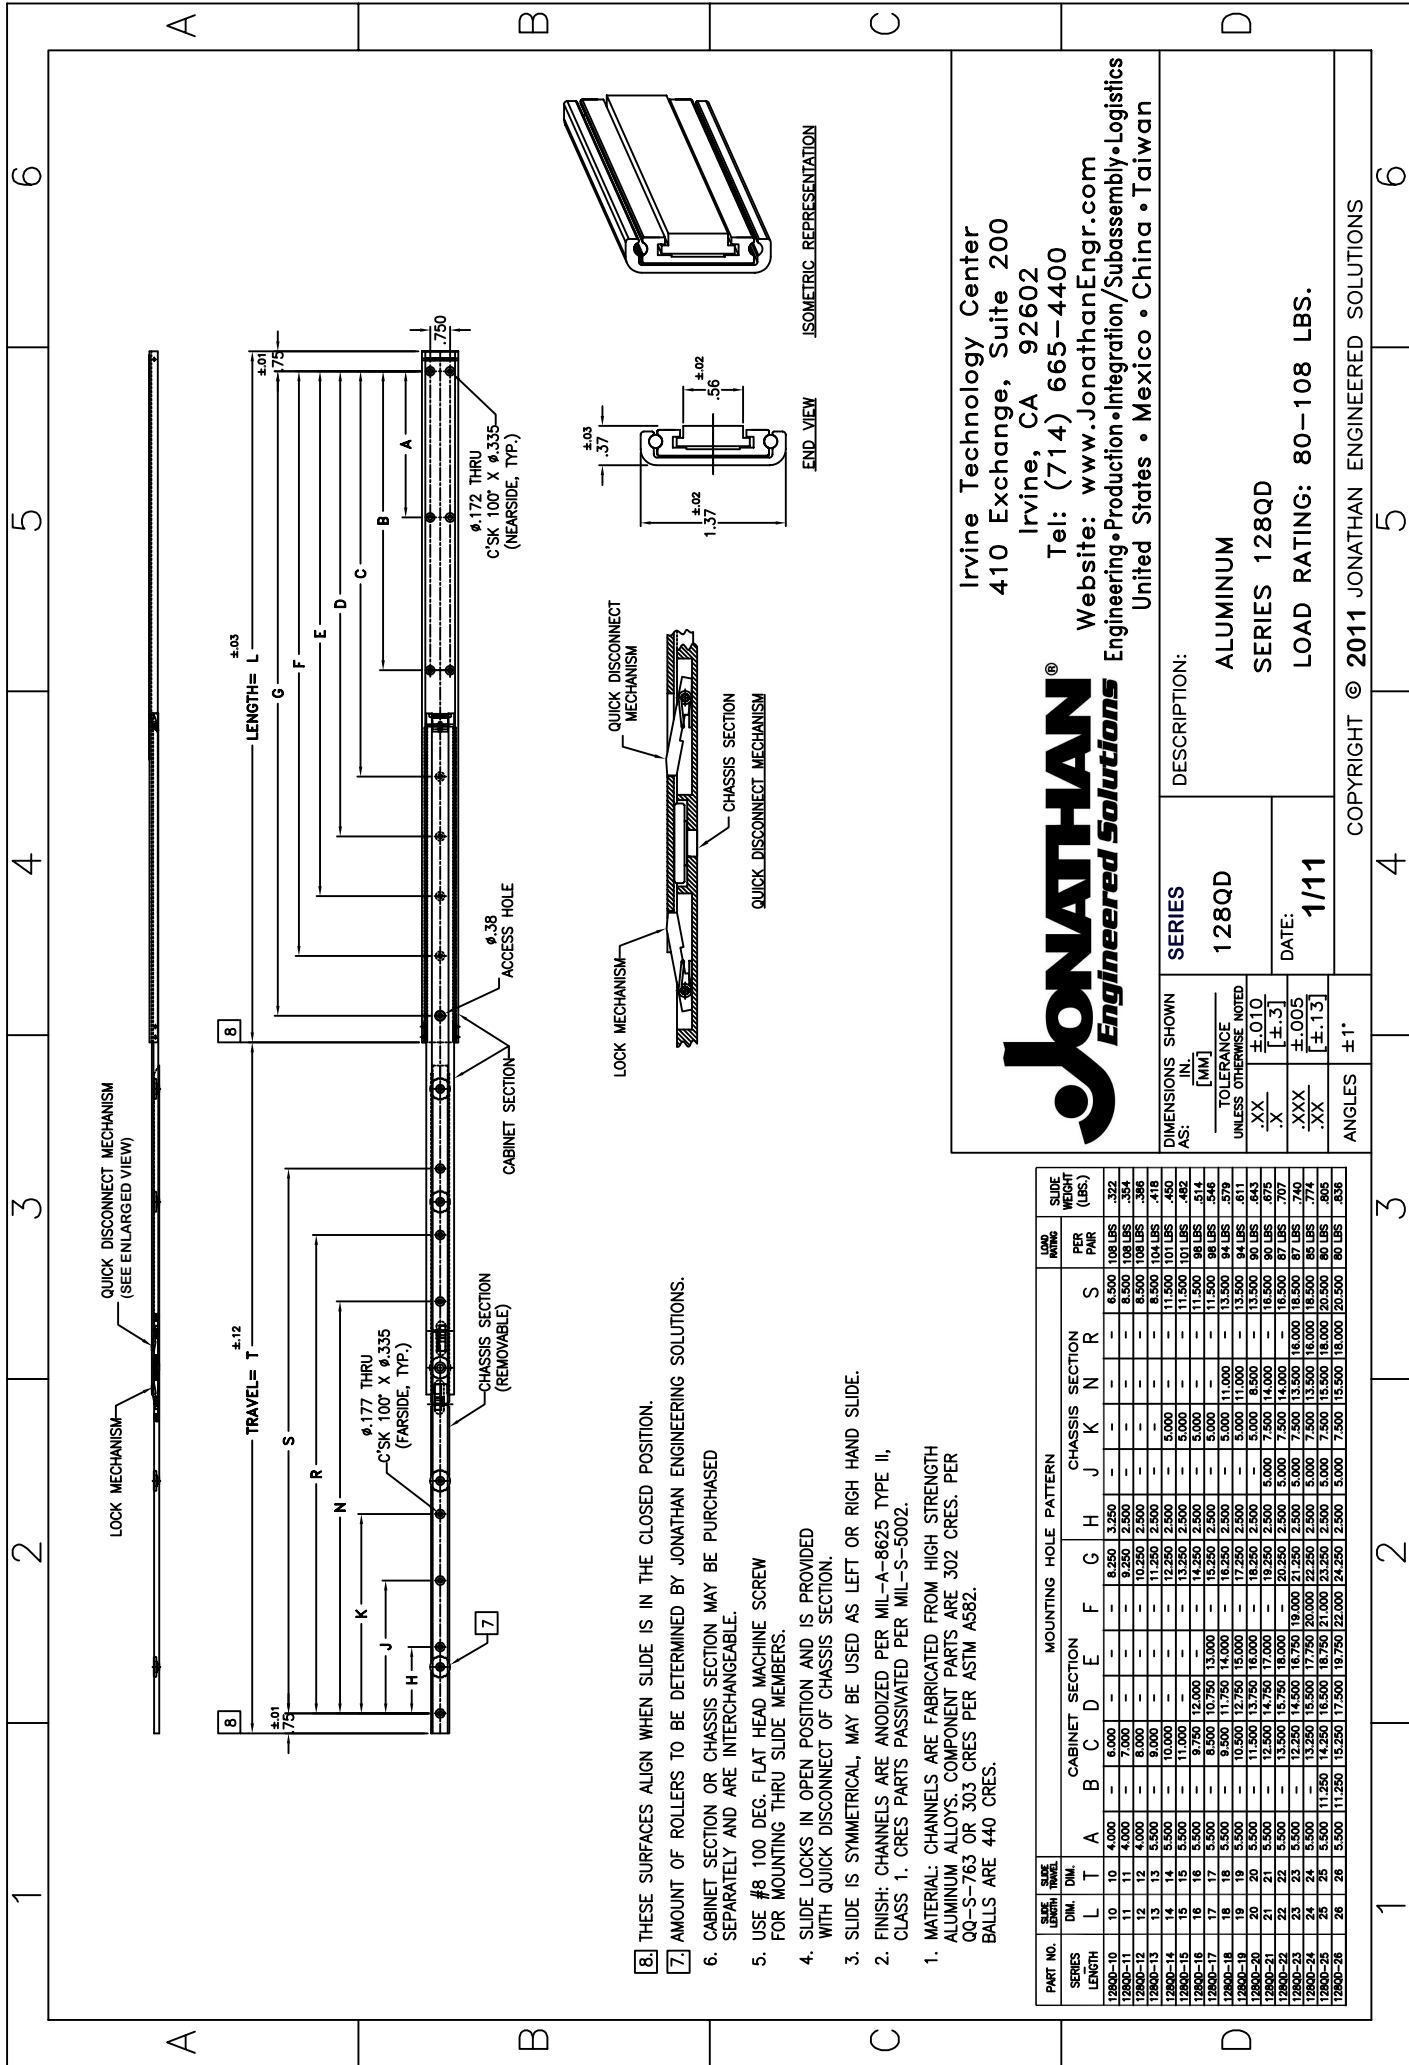

Irvine Technology Center
410 Exchange, Suite 200
Irvine, CA 92602
Tel: (714) 665-4400
Website: www.JonathanEngr.com
Engineering • Production • Integration / Subassembly • Logistics
United States • Mexico • China • Taiwan

DESCRIPTION:

SERIES

128QD

ALUMINUM

SERIES 128QD

LOAD RATING: 80-108 LBS.

DIMENSIONS SHOWN AS:

IN. [MM]

TOLERANCE

UNLESS OTHERWISE NOTED

XX ±.010

X ±.3

XXX ±.005

XX ±.13

ANGLES ±1°

COPYRIGHT © 2011 JONATHAN ENGINEERED SOLUTIONS

- 8. THESE SURFACES ALIGN WHEN SLIDE IS IN THE CLOSED POSITION.
- 7. AMOUNT OF ROLLERS TO BE DETERMINED BY JONATHAN ENGINEERING SOLUTIONS.
- 6. CABINET SECTION OR CHASSIS SECTION MAY BE PURCHASED SEPARATELY AND ARE INTERCHANGEABLE.
- 5. USE #8 100 DEG. FLAT HEAD MACHINE SCREW FOR MOUNTING THRU SLIDE MEMBERS.
- 4. SLIDE LOCKS IN OPEN POSITION AND IS PROVIDED WITH QUICK DISCONNECT OF CHASSIS SECTION.
- 3. SLIDE IS SYMMETRICAL, MAY BE USED AS LEFT OR RIGHT HAND SLIDE.
- 2. FINISH: CHANNELS ARE ANODIZED PER MIL-A-8625 TYPE II, CLASS 1. CRES PARTS PASSIVATED PER MIL-S-5002.
- 1. MATERIAL: CHANNELS ARE FABRICATED FROM HIGH STRENGTH ALUMINUM ALLOYS. COMPONENT PARTS ARE 302 CRES. PER QQ-S-763 OR 303 CRES PER ASTM A582. BALLS ARE 440 CRES.

PART NO.	SERIES	SLIDE LENGTH	DIM. L	DIM. T	MOUNTING HOLE PATTERN													LOAD WING	SLIDE WEIGHT (LBS.)
					A	B	C	D	E	F	G	H	J	K	N	R	S		
12800-10	10	10	4.000	—	—	—	—	—	—	—	8.250	3.250	—	—	—	—	—	8.500	108 LBS.
12800-11	11	11	4.000	—	—	—	—	—	—	—	8.250	3.250	—	—	—	—	—	8.500	108 LBS.
12800-12	12	12	4.000	—	—	—	—	—	—	—	10.250	2.500	—	—	—	—	—	8.500	108 LBS.
12800-13	13	13	5.500	—	—	—	—	—	—	—	11.250	2.500	—	—	—	—	—	8.500	104 LBS.
12800-14	14	14	5.500	—	—	—	—	—	—	—	12.250	2.500	—	—	—	—	—	11.500	101 LBS.
12800-15	15	15	5.500	—	—	—	—	—	—	—	13.250	2.500	—	—	—	—	—	11.500	101 LBS.
12800-16	16	16	5.500	—	—	—	—	—	—	—	14.250	2.500	—	—	—	—	—	11.500	99 LBS.
12800-17	17	17	5.500	—	—	—	—	—	—	—	15.250	2.500	—	—	—	—	—	11.500	99 LBS.
12800-18	18	18	5.500	—	—	—	—	—	—	—	16.250	2.500	—	—	—	—	—	13.500	94 LBS.
12800-19	19	19	5.500	—	—	—	—	—	—	—	17.250	2.500	—	—	—	—	—	13.500	94 LBS.
12800-20	20	20	5.500	—	—	—	—	—	—	—	18.250	2.500	—	—	—	—	—	13.500	94 LBS.
12800-21	21	21	5.500	—	—	—	—	—	—	—	19.250	2.500	—	—	—	—	—	16.500	80 LBS.
12800-22	22	22	5.500	—	—	—	—	—	—	—	20.250	2.500	—	—	—	—	—	16.500	80 LBS.
12800-23	23	23	5.500	—	—	—	—	—	—	—	21.250	2.500	—	—	—	—	—	16.500	80 LBS.
12800-24	24	24	5.500	—	—	—	—	—	—	—	22.250	2.500	—	—	—	—	—	18.500	85 LBS.
12800-25	25	25	5.500	—	—	—	—	—	—	—	23.250	2.500	—	—	—	—	—	18.500	85 LBS.
12800-26	26	26	5.500	—	—	—	—	—	—	—	24.250	2.500	—	—	—	—	—	20.500	80 LBS.