



- NOTES:
1. LEFT SLIDE AS SHOWN, RIGHT SLIDE OPPOSITE.
 2. FOR BRACKETS, SEE SEPARATE SECTION.
 3. CABINET SECTION AND CHASSIS SECTION MAY BE PURCHASED SEPARATELY AND ARE INTERCHANGEABLE. CONTACT JONATHAN FOR ORDERING INFORMATION.
 4. AMOUNT AND LOCATION OF ROLLERS TO BE DETERMINED BY JONATHAN.
 5. SLIDE LOCKS IN OPEN POSITION ONLY.
 6. SLIDE FEATURES QUICK DISCONNECT OF CHASSIS SECTION.
 7. SLIDE FEATURES AN ADJUSTABLE REAR SHOCKBROCK.
 8. MOUNTING HOLE TOLERANCE $\pm .005$
[$\pm .13$]

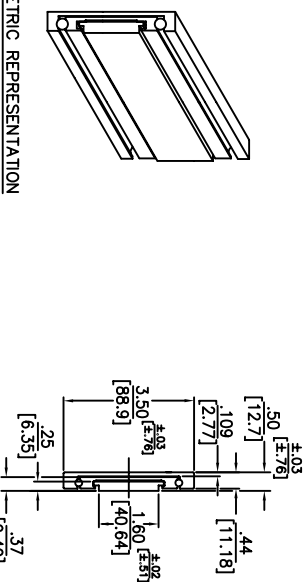

PART NO.	SLIDE LENGTH	SLIDE TRAVEL	MOUNTING HOLE					PATTERN			LOAD RATING
SERIES	DIM.	DIM.	OUTER		MEMBER			CHASSIS SECTION			PER PAIR
LENGTH	L	T	A	B	C	D	E	F	G		
150QDA-10	$\frac{10}{12}$	$\frac{9}{11}$			$\frac{5}{127}$	$\frac{8}{203.2}$		$\frac{6}{152.4}$	$\frac{8}{203.2}$	$\frac{240}{108}$ LBS	
150QDA-12	$\frac{12}{14}$	$\frac{11}{13}$			$\frac{6}{152.4}$	$\frac{10}{254}$		$\frac{7}{177.8}$	$\frac{10}{254}$	$\frac{268}{120}$ KG	
150QDA-14	$\frac{14}{16}$	$\frac{13}{15}$			$\frac{5}{177.8}$	$\frac{8}{304.8}$	$\frac{4}{101.6}$	$\frac{8}{203.2}$	$\frac{12}{304.8}$	$\frac{260}{117}$ KG	
150QDA-16	$\frac{16}{18}$	$\frac{15}{17}$	$\frac{4}{101.6}$	$\frac{8}{203.2}$	$\frac{11}{279.4}$	$\frac{14}{355.6}$	$\frac{9}{101.6}$	$\frac{4}{228.6}$	$\frac{14}{355.6}$	$\frac{241}{209}$ LBS	
150QDA-18	$\frac{18}{20}$	$\frac{17}{19}$	$\frac{5}{127}$	$\frac{10}{254}$	$\frac{13}{330.2}$	$\frac{16}{406.4}$	$\frac{5}{127}$	$\frac{5}{254}$	$\frac{16}{406.4}$	$\frac{214}{197}$ LBS	
150QDA-20	$\frac{20}{22}$	$\frac{19}{21}$	$\frac{5}{127}$	$\frac{10}{254}$	$\frac{18}{355.6}$	$\frac{22}{457.2}$	$\frac{4}{101.6}$	$\frac{12}{304.8}$	$\frac{18}{457.2}$	$\frac{186}{89}$ KG	
150QDA-22	$\frac{22}{24}$	$\frac{21}{23}$	$\frac{6}{152.4}$	$\frac{12}{304.8}$	$\frac{16}{406.4}$	$\frac{20}{457.2}$	$\frac{7}{101.6}$	$\frac{14}{304.8}$	$\frac{20}{457.2}$	$\frac{183}{163}$ LBS	
150QDA-24	$\frac{24}{26}$	$\frac{23}{25}$	$\frac{6}{152.4}$	$\frac{12}{304.8}$	$\frac{17}{406.4}$	$\frac{22}{457.2}$	$\frac{8}{101.6}$	$\frac{15}{304.8}$	$\frac{22}{457.2}$	$\frac{171}{151}$ LBS	
150QDA-26	$\frac{26}{28}$	$\frac{25}{27}$	$\frac{7}{177.8}$	$\frac{14}{355.6}$	$\frac{19}{406.4}$	$\frac{24}{457.2}$	$\frac{9}{203.2}$	$\frac{16}{406.4}$	$\frac{24}{457.2}$	$\frac{163}{143}$ LBS	
150QDA-28	$\frac{28}{30}$	$\frac{27}{29}$	$\frac{7}{177.8}$	$\frac{14}{355.6}$	$\frac{20}{406.4}$	$\frac{26}{457.2}$	$\frac{9}{203.2}$	$\frac{18}{406.4}$	$\frac{26}{457.2}$	$\frac{156}{136}$ LBS	

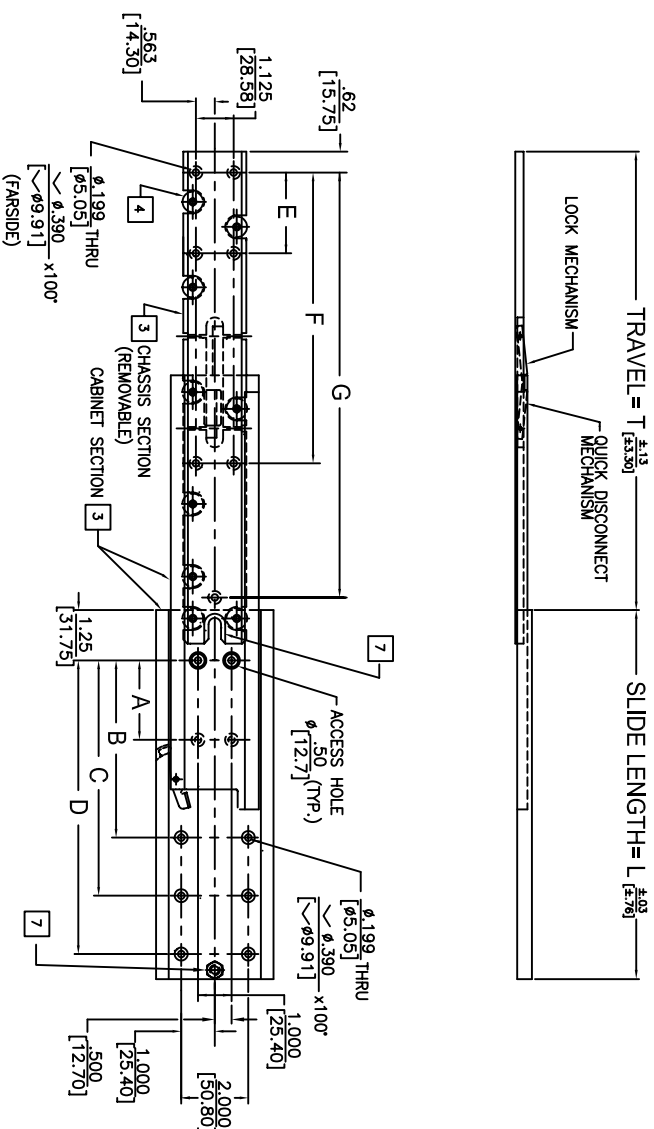

 Jonathan Engineering Solutions Irvine Technology Center 410 Exchange, Suite 200 Irvine, CA 92602 Tel: (714) 665-4400 Website: www.JonathanEngr.com Engineering • Production • Integration • Subassembly • Logistics United States • Mexico • China • Taiwan		150QDA ALUMINUM SERIES 150QDA LOAD RATING: 156-265 LBS. / 70-120 KG.									
DIMENSIONS SHOWN AS: IN. [MM] TOLERANCE UNLESS OTHERWISE NOTED <table border="1"> <tr> <td>.XX</td> <td>±.010</td> </tr> <tr> <td>.X</td> <td>±.3</td> </tr> <tr> <td>.XXX</td> <td>±.005</td> </tr> <tr> <td>.XX</td> <td>±.13</td> </tr> </table>		.XX	±.010	.X	±.3	.XXX	±.005	.XX	±.13	PART NO. DATE: 6/04	
.XX	±.010										
.X	±.3										
.XXX	±.005										
.XX	±.13										
ANGLES ±1°		DESCRIPTION:									
COPYRIGHT © 2004 JONATHAN ENGINEERED SOLUTIONS											