NOTES:

1. SLIDE IS SYMMETRICAL. MAY BE USED AS LEFT OR RIGHT HAND SLIDE.
2. SLIDE IS PROVIDED WITH TYPE 2 SHOCKBLOCKS.
3. MOUNTING HOLE TOLERANCE: ±.005 [±.13]

ORDERING INFO:

300SB–LENGTH (SLIDE WITHOUT LOCK)
300SBL–LENGTH (SLIDE WITH LOCK OPEN)
300SBLR–LENGTH (SLIDE WITH LOCK OPEN & FRONT RELEASE)
* WHEN USED AS PAIRS, DOUBLE LOAD RATING.



ISOMETRIC REPRESENTATION
(SHOWN WITHOUT SHOCKBLOCK)

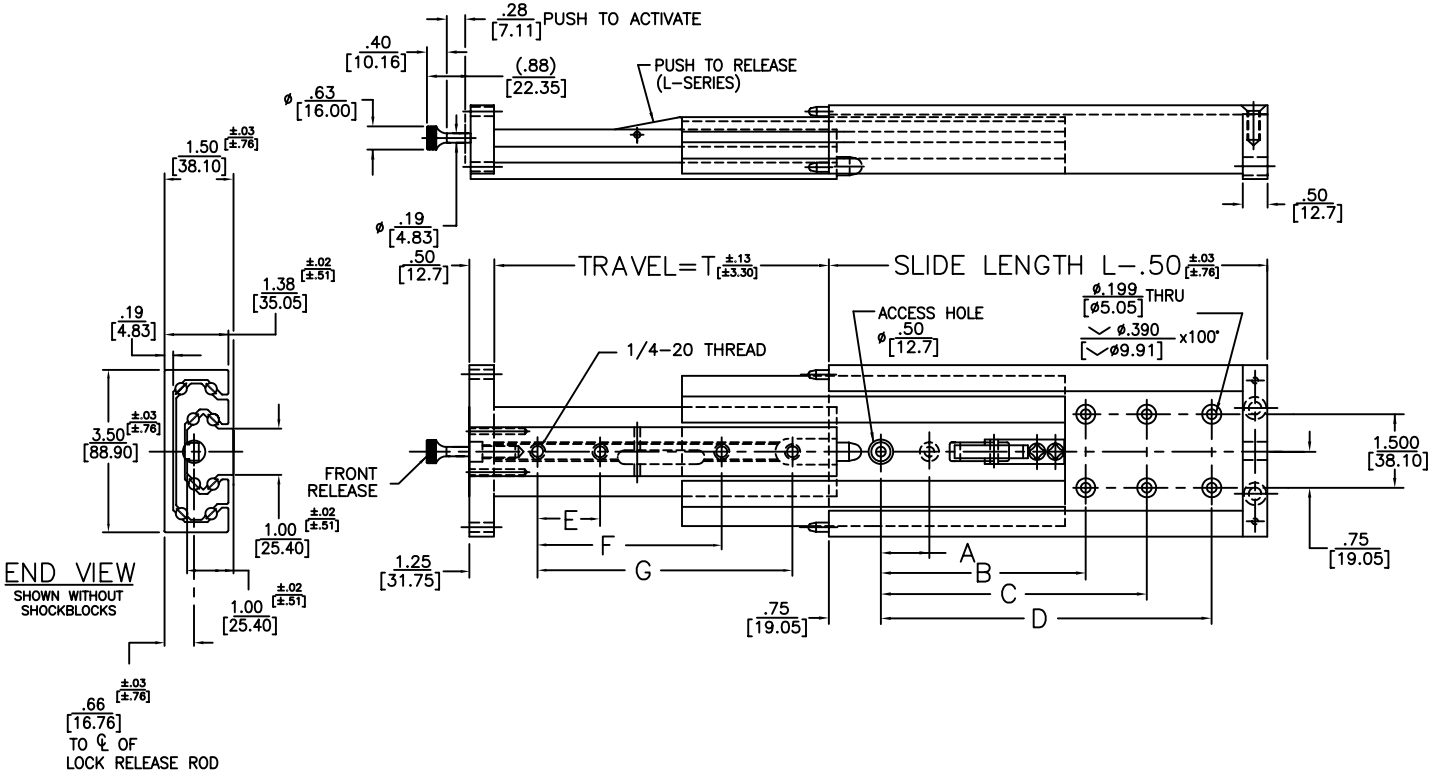

PART NO.	SLIDE LENGTH	SLIDE TRAVEL	MOUNTING HOLE PATTERN							LOAD RATING
			OUTER MEMBER				INNER MEMBER			
SERIES – LENGTH	DIM. L	DIM. T	A	B	C	D	E	F	G	* EACH
–14	14 [355.6]	13 [330.2]			7 [177.8]	12 [304.8]		7 [177.8]	11 [279.4]	250 LBS 113 KG
–16	16 [406.4]	15 [381]	3 [76.2]	8 [203.2]	11 [279.4]	14 [355.6]	3 [76.2]	8 [203.2]	13 [330.2]	252 LBS 114 KG
–18	18 [457.2]	17 [431.8]	4 [101.6]	10 [254]	13 [330.2]	16 [406.4]	4 [101.6]	9 [228.6]	15 [381]	249 LBS 112 KG
–20	20 [508]	19 [482.6]	5 [127]	10 [254]	14 [355.6]	18 [457.2]	5 [127]	11 [279.4]	17 [431.8]	245 LBS 111 KG
–22	22 [558.8]	21 [533.4]	6 [152.4]	12 [304.8]	16 [406.4]	20 [508]	6 [152.4]	12 [304.8]	19 [482.6]	239 LBS 108 KG
–24	24 [609.6]	23 [584.2]	6 [152.4]	12 [304.8]	17 [431.8]	22 [558.8]	7 [177.8]	14 [355.6]	21 [533.4]	232 LBS 105 KG
–26	26 [660.4]	25 [635]	7 [177.8]	14 [355.6]	19 [482.6]	24 [609.6]	8 [203.2]	15 [381]	23 [584.2]	226 LBS 102 KG
–28	28 [711.2]	27 [685.8]	7 [177.8]	14 [355.6]	20 [508]	26 [660.4]	9 [228.6]	17 [431.8]	25 [635]	221 LBS 100 KG
–30	30 [762]	29 [736.6]	8 [203.2]	16 [406.4]	22 [558.8]	28 [711.2]	9 [228.6]	18 [457.2]	27 [685.8]	217 LBS 98 KG
–32	32 [812.8]	31 [787.4]	8 [203.2]	16 [406.4]	23 [584.2]	30 [762]	10 [254]	20 [508]	29 [736.6]	212 LBS 96 KG
–34	34 [863.6]	33 [838.2]	9 [228.6]	18 [457.2]	25 [635]	32 [812.8]	10 [254]	21 [533.4]	31 [787.4]	205 LBS 92 KG
–36	36 [914.4]	35 [889]	9 [228.6]	18 [457.2]	26 [660.4]	34 [863.6]	11 [279.4]	22 [558.8]	33 [838.2]	198 LBS 89 KG

Irvine Technology Center
410 Exchange, Suite 200
Irvine, CA 92602
Tel: (714) 665–4400
Website: www.JonathanEngr.com
Engineering • Production • Integration/Subassembly • Logistics
United States • Mexico • China • Taiwan

DIMENSIONS SHOWN AS: IN. / [MM]	TOLERANCE UNLESS OTHERWISE NOTED
.XX / .X	±.010 [±.3]
.XXX / .XX	±.005 [±.13]
ANGLES	±1°

PART NO. 300SB

DATE: 6/04

DESCRIPTION:
ALUMINUM
SERIES 300SB (UNDERMOUNT)
LOAD RATING: 198–252 LBS./ 89–114 KG.

COPYRIGHT © 2004 JONATHAN ENGINEERED SOLUTIONS