

1

2

3

4

5

A

A

B

B

C





C

D

D

E

E

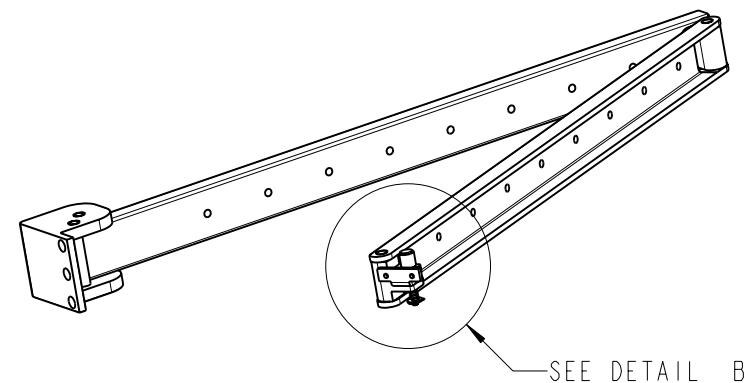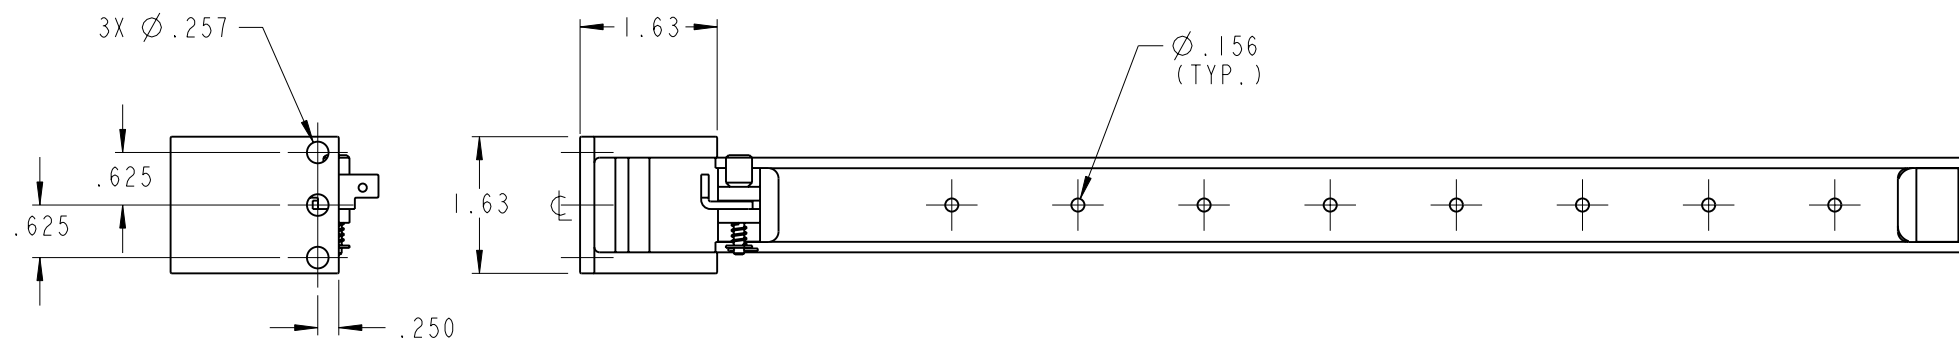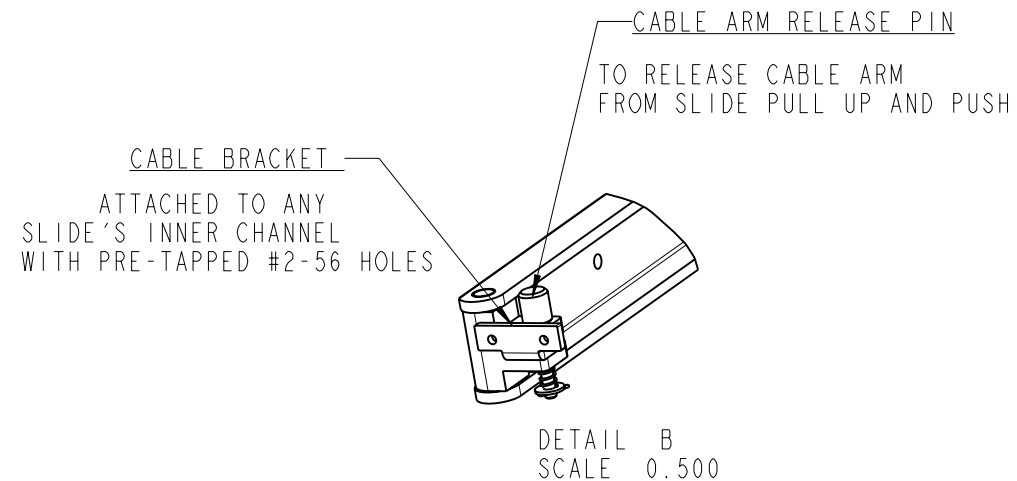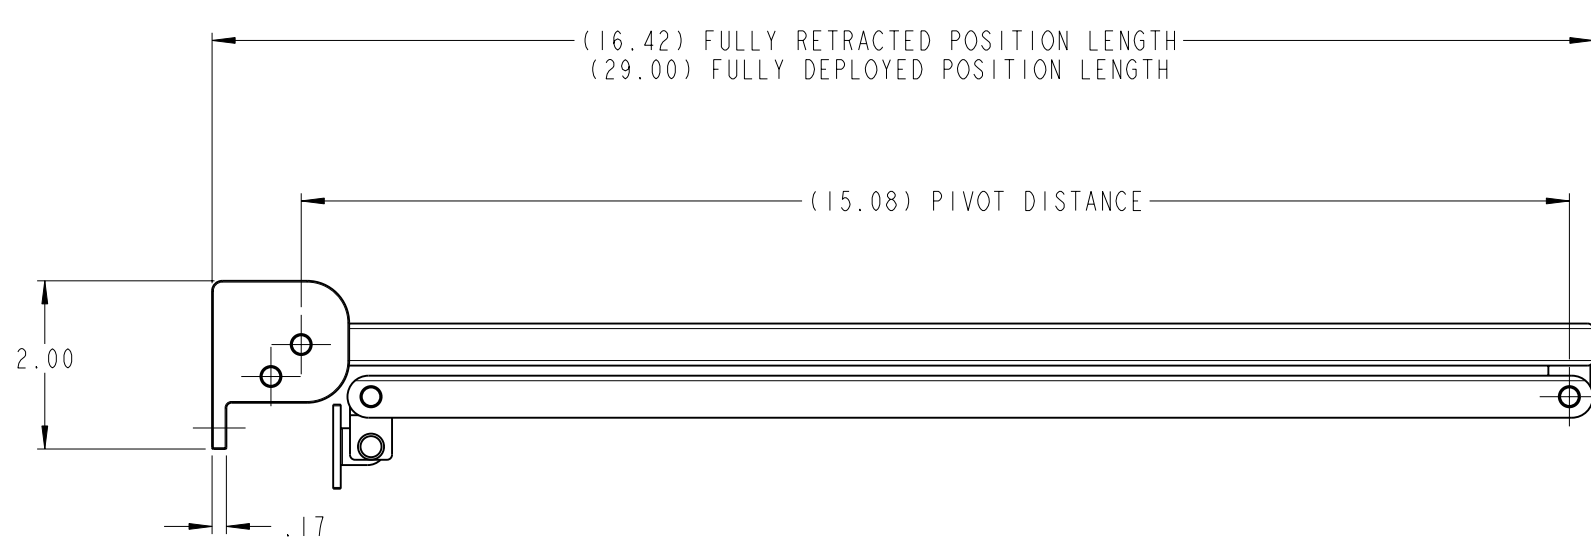

4. LOCTITE IS APPLIED TO SCREW(S)
3. CABLE ARM IS PROPRIETARY TO JONATHAN ENGINEERED SOLUTIONS AND IS PATENT PENDING.
2. FINISH: ALUMINUM PARTS ARE ANODIZED PER MIL-A-8625, TYPE II, CLASS I. CRES COMPONENTS ARE PASSIVATED PER SAE-AMS-QQ-P-35.
1. MATERIAL: CABLE ARMS AND BRACKET ARE FABRICATED FROM HIGH STRENGTH ALUMINUM ALLOY WITH A MINIMUM TENSILE STRENGTH OF 35,000 PSI. COMPONENT PARTS ARE STAINLESS STEEL AND HIGH STRENGTH ALUMINUM.



Irvine Technology Center
410 Exchange, Suite 200
Irvine, CA 92602
Tel. (714) 665-4400
Fax: (714) 368-7002
Website: www.jonathanengr.com
Engineer - Production - Integration/ Subassembly - Logistics
United States - Mexico - China - Taiwan

<i>TOLERANCES UNLESS OTHERWISE NOTED</i>				<i>PART NUMBER :</i> CMS-15QD-1U	<i>DESCRIPTION :</i> MATERIAL: ALUMINUM SERIES: CMS-15QD	
<i>.XX</i>	<i>.XXX</i>	<i>ANGLES</i>	<i>HOLES</i>	<i>DATE :</i> 11/18/10		
$\pm .03$	$\pm .010$	$\pm 1^{\circ}$	$\pm .005$			
SHEET 1 OF 1				COPYRIGHT © 2009 JONATHAN ENGINEERED SOLUTIONS		