





- NOTES:**
1. SLIDE IS SYMMETRICAL. MAY BE USED AS LEFT OR RIGHT HAND SLIDE.
 2. HOLES OTHER THAN SHOWN, MAY BE IN THE SLIDE MEMBERS AT JONATHAN OPTION.
 3. CUSHIONED CLOSED POSITION STOP.
 4. USE NUMBER 8 PAN OR BINDING HEAD SCREWS FOR MOUNTING THRU THE SLIDE MEMBERS.
 5. SLIDE IS SUITABLE AS UNDERMOUNT.  (LOAD RATING CAPACITY IS 80% LESS)



ISOMETRIC REPRESENTATION



END VIEW

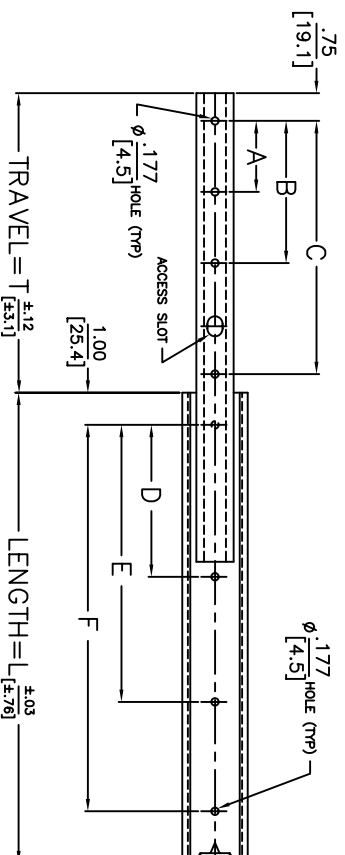

PART NO.	SLIDE LENGTH	SLIDE TRAVEL	MOUNTING HOLE PATTERN						LOAD RATING
SERIES	DIM. L	DIM. T	INNER CHANNEL			OUTER CHANNEL			PER PAIR
LENGTH			A	B	C	D	E	F	
320-12	12	8	3,500		7,000	5,000		10,000	72 LBS 33 KG
	304.8	203	88.90		177.80	127.00		254.00	
320-14	14	10	4,500		9,000	4,000	8,000	12,000	67 LBS
	355.6	254	114.30		228.60	101.60	203.20	304.80	31 KG
320-16	16	11	3,000	7,000	10,000	5,000	9,000	14,000	88 LBS
	406.4	279	76.20	177.80	254.00	127.00	228.60	355.60	40 KG
320-18	18	13	4,000	8,000	12,000	5,500	10,500	16,000	81 LBS
	457.2	330	101.60	203.20	304.80	139.70	266.70	406.40	37 KG
320-20	20	15	5,000	9,000	14,000	6,000	12,000	18,000	75 LBS
	508	381	127.00	228.60	355.60	152.40	304.80	457.20	34 KG
320-22	22	17	5,000	11,000	16,000	7,000	13,000	20,000	68 LBS
	558.8	432	127.00	279.40	406.40	177.80	330.20	508.00	31 KG
320-24	24	17.5	6,000	11,000	16,500	7,500	14,500	22,000	87 LBS
	609.6	445	152.40	279.40	419.10	190.50	366.30	556.80	40 KG
320-26	26	19.5	6,000	12,500	18,500	8,000	16,000	24,000	81 LBS
	660.4	495	152.40	317.50	469.90	203.20	406.40	609.60	37 KG
320-28	28	21	7,000	13,000	20,000	9,000	17,000	26,000	85 LBS
	711.2	533	177.80	330.20	508.00	228.60	431.80	660.40	39 KG



Irvine Technology Center
410 Exchange, Suite 200
Irvine, CA 92602
Tel: (714) 665-4400
Website: www.jonathanengr.com
Engineering • Production • Integration / Subassembly • Logistics
United States • Mexico • China • Taiwan

DIMENSIONS SHOWN		PART NO.	DESCRIPTION:
AS: INL	[MM]	320	STEEL
TOLERANCE	UNLESS OTHERWISE NOTED		SERIES 320
.XX	±.020		LOAD RATING: 67-88 LBS./ 31-40 KG.
.X	±.51	DATE: 6/04	
.XXX	±.010		
.XX	±.25		
ANGLES	±1°		

COPYRIGHT © 2004 JONATHAN ENGINEERED SOLUTIONS