





- NOTES:**
1. SLIDE IS SYMMETRICAL. MAY BE USED AS LEFT OR RIGHT HAND SLIDE.
 2. HOLES OTHER THAN SHOWN MAY BE IN THE SLIDE MEMBERS AT JONATHAN OPTION.
 3. FOR "EIA/RETMA" BRACKETS, SEE SEPARATE SECTION.
 4. NON METALLIC STOPS OPEN AND CLOSED.
 5. USE NUMBER 8 PAN OR BINDING HEAD SCREWS FOR MOUNTING THRU SLIDE MEMBERS.
 6. SLIDE IS PROVIDED WITH LOCK OPEN FEATURE.



ISOMETRIC REPRESENTATION

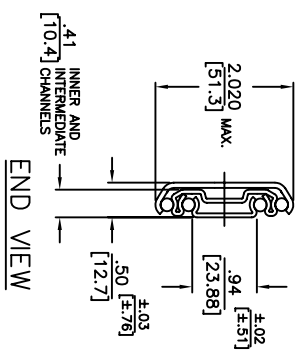

END VIEW

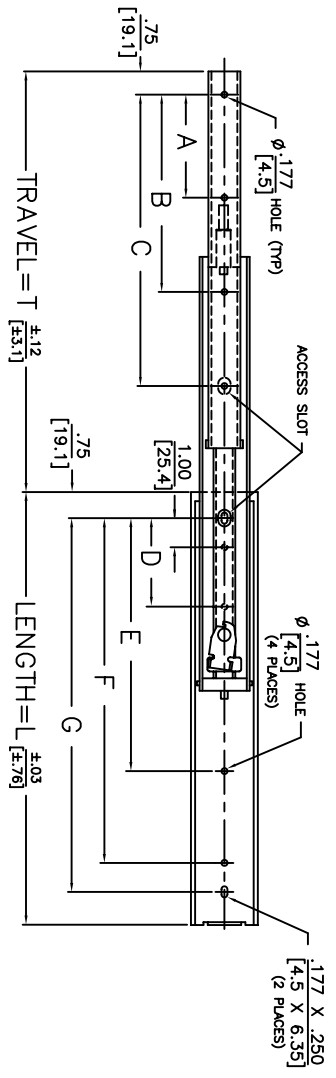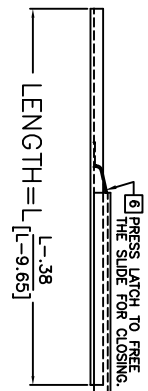

PART NO.	SLIDE DIM. LENGTH	SLIDE DIM. TRAVEL	INNER CHANNEL			OUTER CHANNEL			LOAD RATING PER PAIR
			A	B	C	D	E	F	
370L-10	10	11	2.000	7.000	4.500	7.500	8.500	180	LBS
	254	279	50.80	177.80	114.30	190.50	215.90	82	KG
370L-12	12	13	3.000	9.000	5.500	9.500	10.500	175	LBS
	304.8	330	76.20	228.60	139.70	241.30	266.70	79	KG
370L-14	14	15	4.000	11.000	6.500	11.500	12.500	170	LBS
	355.6	381	101.60	279.40	160.10	292.10	317.50	77	KG
370L-16	16	17	4.500	13.000	9.500	13.500	14.500	160	LBS
	406.4	432	114.30	330.20	127.00	241.30	342.90	73	KG
370L-18	18	19	5.500	15.500	5.500	11.000	15.500	150	LBS
	457.2	483	139.70	292.10	381.00	139.70	279.40	68	KG
370L-20	20	21	6.000	12.500	6.000	12.500	17.500	145	LBS
	508	533	152.40	317.50	152.40	317.50	444.50	66	KG
370L-22	22	23	7.000	14.000	7.000	13.500	19.500	140	LBS
	558.8	584	177.80	355.60	177.80	342.90	495.30	64	KG
370L-24	24	25	7.500	15.000	7.500	15.000	21.500	135	LBS
	609.6	635	190.50	381.00	190.50	381.00	546.10	61	KG
370L-26	26	27	8.000	16.500	8.000	16.500	23.500	130	LBS
	660.4	686	203.20	419.10	203.20	419.10	596.90	59	KG
370L-28	28	29	9.000	18.000	9.000	17.500	25.500	125	LBS
	711.2	737	228.60	457.20	228.60	444.50	647.70	57	KG
370L-30	30	31	9.500	19.000	9.500	19.000	27.500	120	LBS
	762	787	241.30	482.80	241.30	482.80	698.50	55	KG



Irvine Technology Center
 410 Exchange, Suite 200
 Irvine, CA 92602
 Tel: (714) 665-4400
 Website: www.jonathanEng.com
 Engineering • Production • Integration • Subassembly • Logistics
 United States • Mexico • China • Taiwan

DIMENSIONS SHOWN AS: INL [MM]		PART NO. 370L		DESCRIPTION: STEEL	
TOLERANCE UNLESS OTHERWISE NOTED		DATE: 6/04		SERIES 370L	
XX	±.020			LOAD RATING: 120-180 LBS. / 55-82 KG.	
X	±.51				
XXX	±.010				
XX	±.25				
ANGLES ±1°					

COPYRIGHT © 2004 JONATHAN ENGINEERED SOLUTIONS