
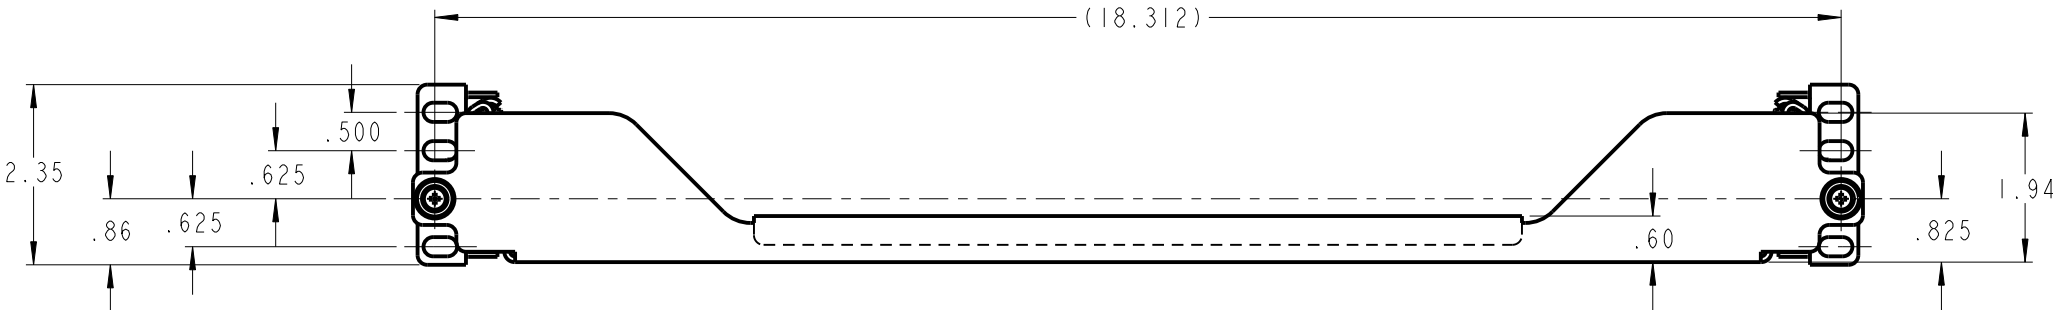
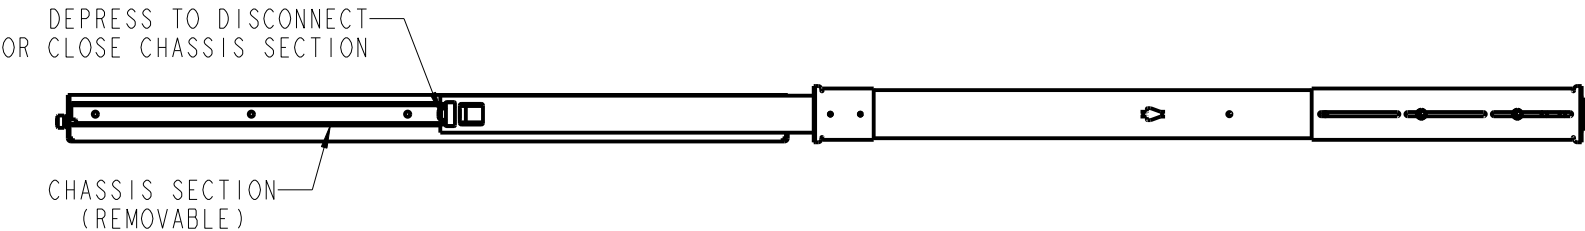


1		2				3		4		5	
TRAY KIT	TRAY LENGTH	TRAVEL	LENGTH	REAR BRACKET ADJUSTMENT RANGE	LOAD RATING PER TRAY - LBS						
PART NO.	L	T	A	B							
T2U-100-14	14.00	15.00	16.00	14.00 - 20.00	165						
T2U-100-16	16.00	17.00	18.00	16.00 - 22.00	155						
T2U-100-18	18.00	19.00	20.00	16.00 - 24.00	145						
T2U-100-20	20.00	21.00	22.00	18.00 - 26.00	135						
T2U-100-22	22.00	23.00	24.00	20.00 - 28.00	130						
T2U-100-24	24.00	25.00	26.00	22.00 - 30.00	125						
T2U-100-26	26.00	27.00	28.00	24.00 - 32.00	120						
T2U-100-28	28.00	29.00	30.00	26.00 - 34.00	115						

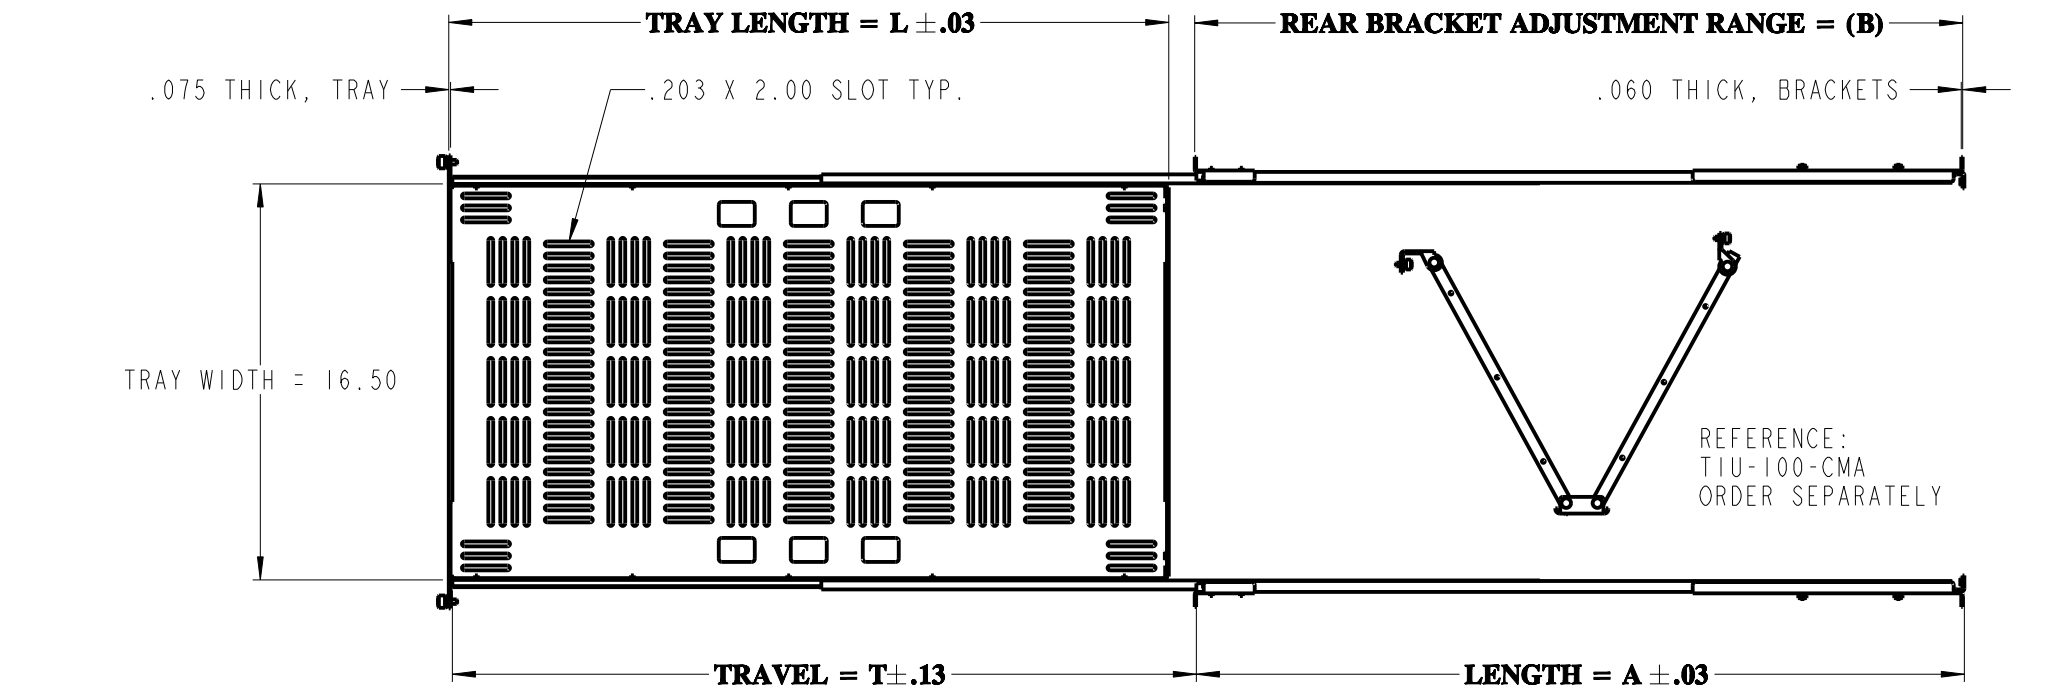

#10-32 PANEL FASTENER, 2X

FRONT VIEW

7. TRAY IS SYMMETRICAL AND MAY BE MOUNTED AS A SHELF OR TRAY AS SHOWN ON SHEET 2 OF 2. TO CONVERT, SIMPLY DISCONNECT, FLIP OVER AND RE-INSTALL

6. TRAY KIT INCLUDES:

- 1 EA. SLIDES ASSY AND TRAY RIVETED
- 1 EA. HARDWARE KIT:
 - 16 EA. CLIP NUTS #10-32
 - 14 EA. SCREWS PHPH #10-32 X 1/2" SS

5. SLIDE LOCKS IN FULL OPEN POSITION AND IS PROVIDED WITH QUICK DISCONNECT OF CHASSIS SECTION.

4. SLIDE BALL SPACER: HIGH IMPACT EXTRUDED PLASTIC
SLIDE BALL RETAINER: CRS BRIDGED FOR TRU-TRACKING


3. SLIDE LUBRICATION: EXTREME PRESSURE HI-LOW TEMPERATURE POLYMER GREASE.

2. FINISH: SLIDE CHANNELS AND BRACKETS ARE COMMERCIAL ZINC PLATE.
TRAY IS POLYURETHANE BLACK POWDER COAT.


1. MATERIAL: SLIDE CHANNELS, BRACKETS AND TRAY ARE COLD ROLLED STEEL.

Irvine Technology Center
410 Exchange, Suite 200
Irvine, CA 92602
Tel: (714) 665-4400
Fax: (714) 368-7002
Website: www.jonathanengr.com
Engineer - Production - Integration/ Subassembly - Logistics
United States - Mexico - China - Taiwan


TOLERANCES UNLESS OTHERWISE NOTED				PART NUMBER : T2U-100		DESCRIPTION : STEEL T2U-100 LOAD RATING : 115-165 LBS.		
.XX	.XXX	ANGLES	HOLES	DATE :	07/15/10			
± .03	± .010	± 2°	± .005					
SHEET 1 OF 2				COPYRIGHT © 2009 JONATHAN ENGINEERED SOLUTIONS				

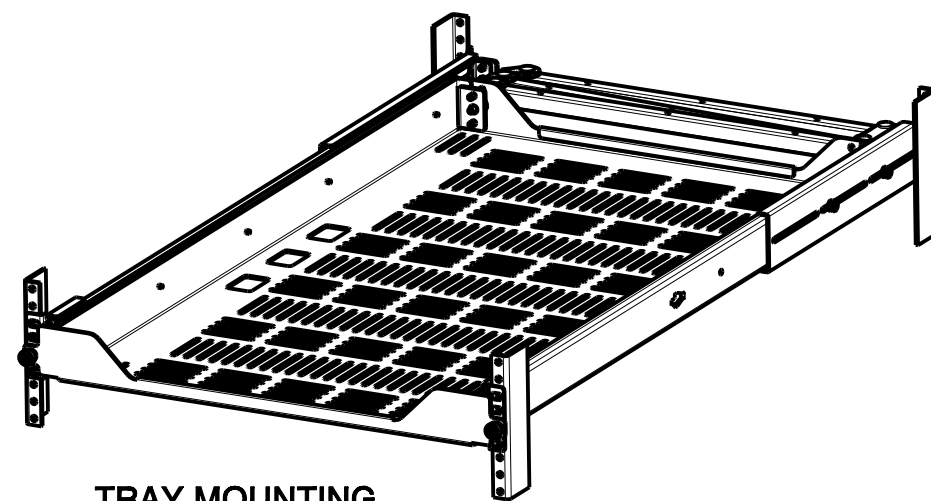


TRAY MOUNTING

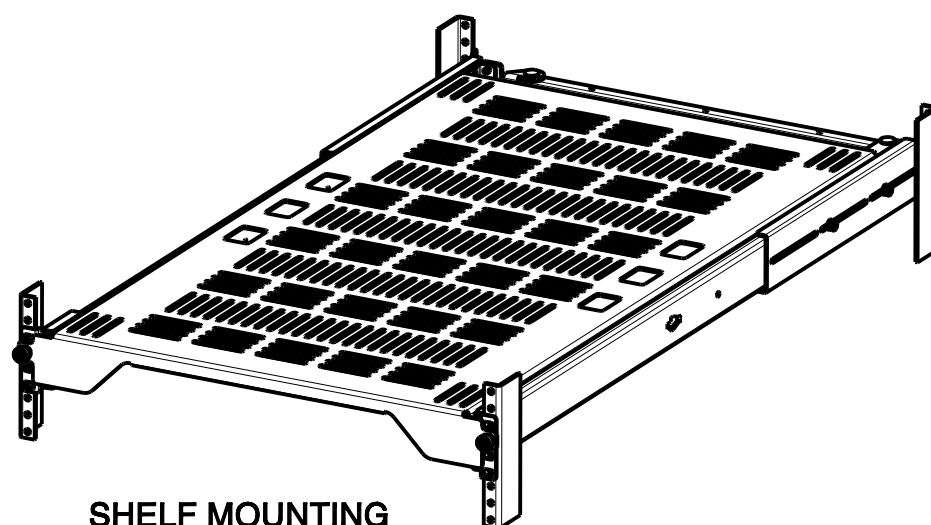

SHELF MOUNTING

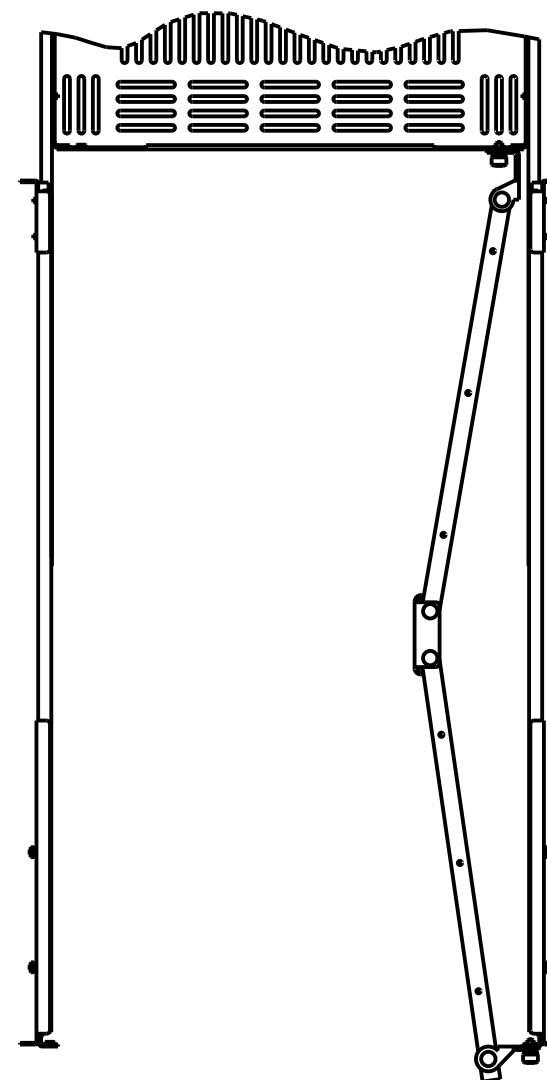

OPEN POSITION SHOWN

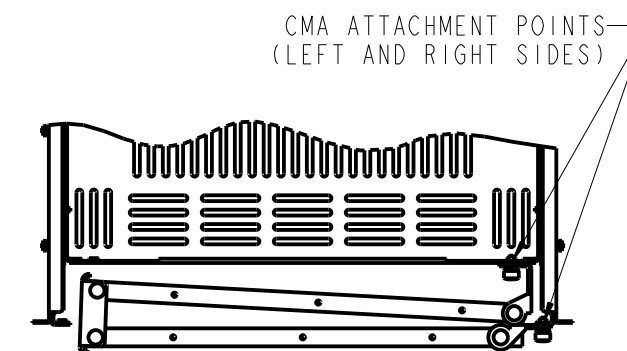

CLOSED POSITION SHOWN

8. ACCESSORIES: ORDER SEPARATELY

TIU-100-CMA	IU CABLE ARM ASSEMBLY - CRS, ZINC PLATE
TK-STP-4-K	STRAP WITH METAL CAM BUCKLE KIT 2 EA. STRAP WITH BUCKLE 4 FEET LONG.
TK-STP-5-K	STRAP WITH METAL CAM BUCKLE KIT 2 EA. STRAP WITH BUCKLE 5 FEET LONG.
TK-MAT-1212	ANTI SLIP MAT 12" X 12"
TK-MAT-1218	ANTI SLIP MAT 12" X 18"
TK-HLT	STRAP TRAY KIT 4 EA. .75 X 14.00 STRAP
TK-HLC	HOOK AND LOOP CMA KIT 4 EA. .50 X 8.00 HOOK AND LOOP STRAP



Irvine Technology Center
410 Exchange, Suite 200
Irvine, CA 92602
Tel. (714) 665-4400
Fax: (714) 368-7002
Website: www.jonathanengr.com
Engineer - Production - Integration/ Subassembly - Logistics
United States - Mexico - China - Taiwan

<i>TOLERANCES UNLESS OTHERWISE NOTED</i>				<i>PART NUMBER :</i> T2U-100	<i>DESCRIPTION :</i> STEEL T2U-100 LOAD RATING : 115-165 LBS.
<i>.XX</i>	<i>.XXX</i>	<i>ANGLES</i>	<i>HOLES</i>	<i>DATE :</i> 03/26/10	
± .03	± .010	± 2°	± .005		
SHEET 2 OF 2				COPYRIGHT © 2009 JONATHAN ENGINEERED SOLUTIONS	