



DETAIL A
 CABLE BRACKET SPO-1442 ATTACHED TO ANY SLIDE'S CHASSIS SECTION WITH PRE-TAPPED #6-32 HOLES
 PULL RELEASE PIN UP AND PUSH TO DISENGAGE

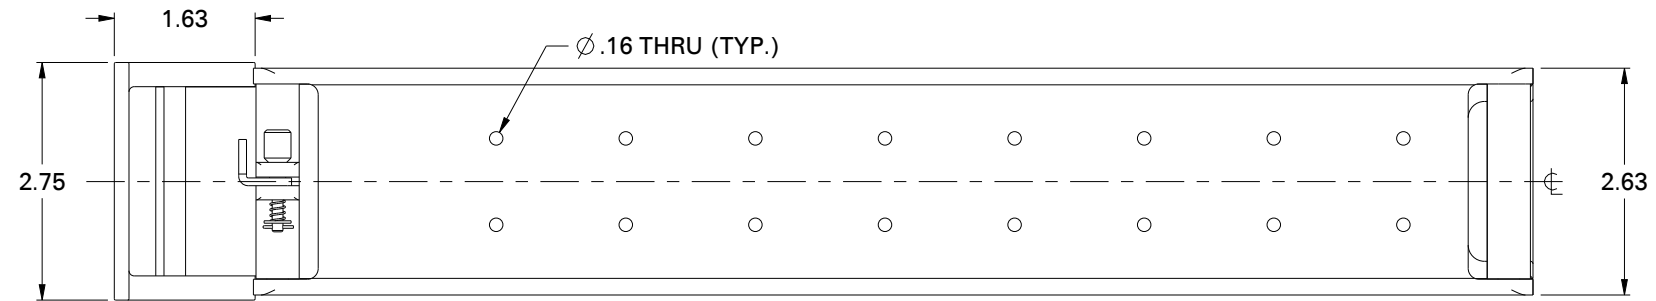

6. PART NUMBER ORDERING:
 CMS-15QD-2U CABLE MANAGER, 2U, LONGITUDINAL MOUNTED, LHS, SHOWN.
 CMS-15QD-2U-R CABLE MANAGER, 2U, LONGITUDINAL MOUNTED, RHS, MIRROR OF SHOWN.
5. CABLE ARM INCLUDES BRACKET SPO-1442.
4. LOCTITE IS APPLIED TO SCREWS.
3. CABLE ARM IS PROPRIETARY TO JONATHAN ENGINEERED SOLUTIONS AND IS PATENT PENDING.
2. FINISH: ALUMINUM PARTS ARE ANODIZED PER MIL-PRF-8625, TYPE II, CLASS I. CRES COMPONENTS ARE PASSIVATED PER SAE-AMS-2700.
1. MATERIAL: CABLE ARMS AND BRACKET ARE FABRICATED FROM HIGH STRENGTH ALUMINUM ALLOY WITH A MINIMUM TENSILE STRENGTH OF 35,000 PSI. COMPONENT PARTS ARE STAINLESS STEEL AND HIGH STRENGTH ALUMINUM.

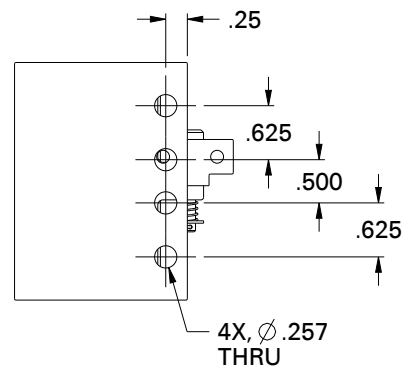

Irvine Technology Center
 250 Commerce, Suite 100
 Irvine, CA 92602
 Tel. (714) 665-4400
 Fax: (714) 368-7002
 Website: www.jonathanengr.com
 Engineer - Production - Integration/ Subassembly - Logistics
 United States - Mexico - China - Taiwan

TOLERANCES UNLESS OTHERWISE NOTED				PART NUMBER :		DESCRIPTION :
				CMS-15QD-2U		
.XX	.XXX	ANGLES	HOLES	DATE :		
± .01	± .005	± 1°	± .005	02/27/26		
SHEET 1 OF 1				COPYRIGHT © 2012 JONATHAN ENGINEERED SOLUTIONS		