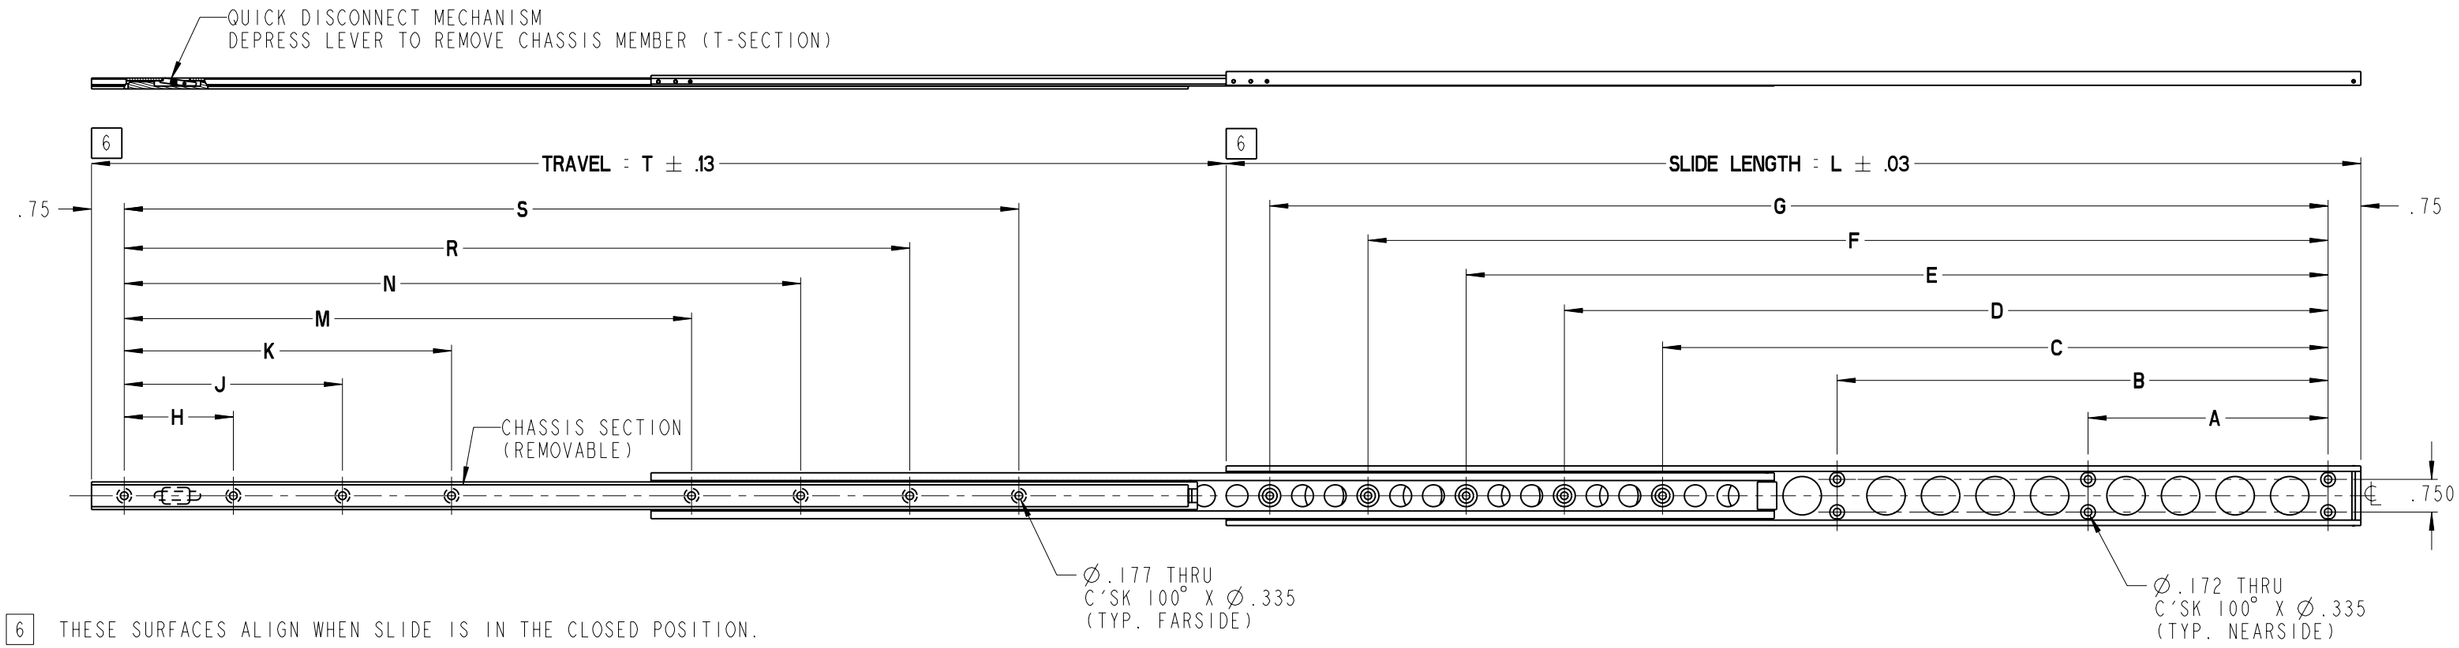

6 THESE SURFACES ALIGN WHEN SLIDE IS IN THE CLOSED POSITION.

5. USE #8 X 100° FLAT HEAD MACHINE SCREWS FOR MOUNTING THRU SLIDE MEMBERS

4. SLIDE FEATURES QUICK DISCONNECT OF CHASSIS SECTION

3. SLIDE IS SYMMETRICAL AND MAY BE USED AS LEFT OR RIGHT HAND SLIDE

2. FINISH: CHANNELS ARE ANODIZED PER MIL-A-8625 TYPE II, CLASS 2, COLOR: BLACK OR TYPE II, CLASS I (CLEAR). CRES PARTS ARE PASSIVATED PER SAE-AMS-QQ-P-35

1. MATERIALS: SLIDE CHANNELS ARE FABRICATED FROM HIGH STRENGTH ALUMINUM ALLOYS COMPONENT PART ARE FABRICATED FROM HIGH STRENGTH ALUMINUM ALLOYS AND CORROSION RESISTANT STEEL. BALLS ARE 440 CRES OR ACETAL. BUMPER IS SANTOPRENE (T.P.E.)

7. WHEN ORDERING PLEASE SPECIFY FINISH AND BALL MATERIAL BY USING THE FOLLOWING SUFFIX:

E I 2 9 T P B - 20

- 20 — SLIDE LENGTH
- B — BLACK ANODIZE FINISH (BLANK IF CLEAR)
- P — POLYMER BALL BEARINGS (BLANK IF CRES BALL BEARINGS)
- E I 2 9 T — SLIDE MODEL/SERIES

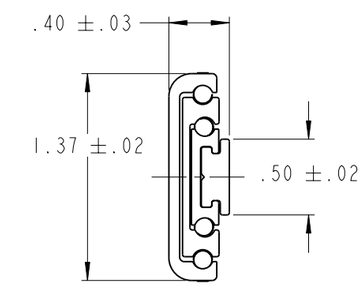

END VIEW

SERIES - LENGTH	SLIDE LENGTH	SLIDE TRAVEL	MOUNTING HOLE PATTERN															LOAD RATING (LBS)	SLIDE WEIGHT CRES BALLS (LBS)	SLIDE WEIGHT ACETAL BALLS (LBS)
			CABINET SECTION							CHASSIS SECTION										
PART NO.	L	T	A	B	C	D	E	F	G	H	J	K	M	N	R	S		PER PAIR		
E129T-6	6.00	6.00	-	-	2.000	-	-	-	4.250	-	-	-	-	-	-	3.500		98	.203	.199
E129T-7	7.00	7.00	-	-	3.000	-	-	-	5.250	2.500	-	-	-	-	-	4.500		98	.244	.233
E129T-8	8.00	8.00	3.000	-	4.000	-	-	-	6.250	2.750	-	-	-	-	-	5.500		101	.280	.268
E129T-9	9.00	9.00	3.000	-	5.000	-	-	-	7.250	3.250	-	-	-	-	-	6.500		101	.320	.300
E129T-10	10.00	10.00	4.000	-	6.000	-	-	-	8.250	3.250	-	-	-	-	-	6.500		108	.356	.334
E129T-11	11.00	11.00	4.000	-	7.000	-	-	-	9.250	2.500	-	-	6.000	-	-	8.500		108	.397	.368
E129T-12	12.00	12.00	4.000	-	8.000	-	-	-	10.250	2.500	-	-	6.000	-	-	8.500		104	.431	.402
E129T-13	13.00	13.00	5.500	-	9.000	-	-	-	11.250	2.500	-	-	6.000	-	-	8.500		104	.470	.432
E129T-14	14.00	14.00	5.500	-	10.000	-	-	-	12.250	2.500	-	5.000	9.000	-	-	11.500		101	.507	.461
E129T-15	15.00	15.00	5.500	-	11.000	-	-	-	13.250	2.500	-	5.000	9.000	-	-	11.500		101	.541	.497
E129T-16	16.00	16.00	5.500	-	7.500	9.750	12.000	-	14.250	2.500	-	5.000	9.000	-	-	11.500		98	.583	.529
E129T-17	17.00	17.00	5.500	-	8.500	10.750	13.000	-	15.250	2.500	-	5.000	9.000	-	-	11.500		98	.621	.565
E129T-18	18.00	18.00	5.500	-	9.500	11.750	14.000	-	16.250	2.500	-	5.000	8.500	11.000	-	13.500		94	.659	.600
E129T-19	19.00	19.00	5.500	-	10.500	12.750	15.000	-	17.250	2.500	-	5.000	8.500	11.000	-	13.500		94	.696	.632
E129T-20	20.00	20.00	5.500	-	11.500	13.750	16.000	-	18.250	2.500	-	5.000	8.500	11.000	-	13.500		90	.735	.662
E129T-21	21.00	21.00	5.500	-	12.500	14.750	17.000	-	19.250	2.500	5.000	7.500	11.500	14.000	-	16.500		90	.768	.701
E129T-22	22.00	22.00	5.500	-	13.500	15.750	18.000	-	20.250	2.500	5.000	7.500	11.500	14.000	-	16.500		87	.810	.727
E129T-23	23.00	23.00	5.500	-	12.250	14.500	16.750	19.000	21.250	2.500	5.000	7.500	11.000	13.500	16.000	18.500		87	.844	.763
E129T-24	24.00	24.00	5.500	-	13.250	15.500	17.750	20.000	22.250	2.500	5.000	7.500	11.000	13.500	16.000	18.500		85	.886	.798
E129T-25	25.00	25.00	5.500	11.250	14.250	16.500	18.750	21.000	23.250	2.500	5.000	7.500	13.000	15.500	18.000	20.500		85	.920	.830
E129T-26	26.00	26.00	5.500	11.250	15.250	17.500	19.750	22.000	24.250	2.500	5.000	7.500	13.000	15.500	18.000	20.500		80	.962	.864

JONATHAN® Engineered Solutions

Irvine Technology Center
410 Exchange, Suite 200
Irvine, CA 92602
Tel. (714) 665-4400
Fax: (714) 368-7002
Website: www.jonathanengr.com
Engineer - Production - Integration/ Subassembly - Logistics
United States - Mexico - China - Taiwan

TOLERANCES UNLESS OTHERWISE NOTED			
.XX	.XXX	ANGLES	HOLES
± .01	± .005	± 1°	± .005

SHEET 1 OF 1

PART NUMBER : E129T

DATE : 10/22/10

DESCRIPTION :

ALUMINUM
SERIES E129T
LOAD RATING : 80-108 LBS

COPYRIGHT © 2009 JONATHAN ENGINEERED SOLUTIONS