

A

B

C

D

E


A

B

C

D

E

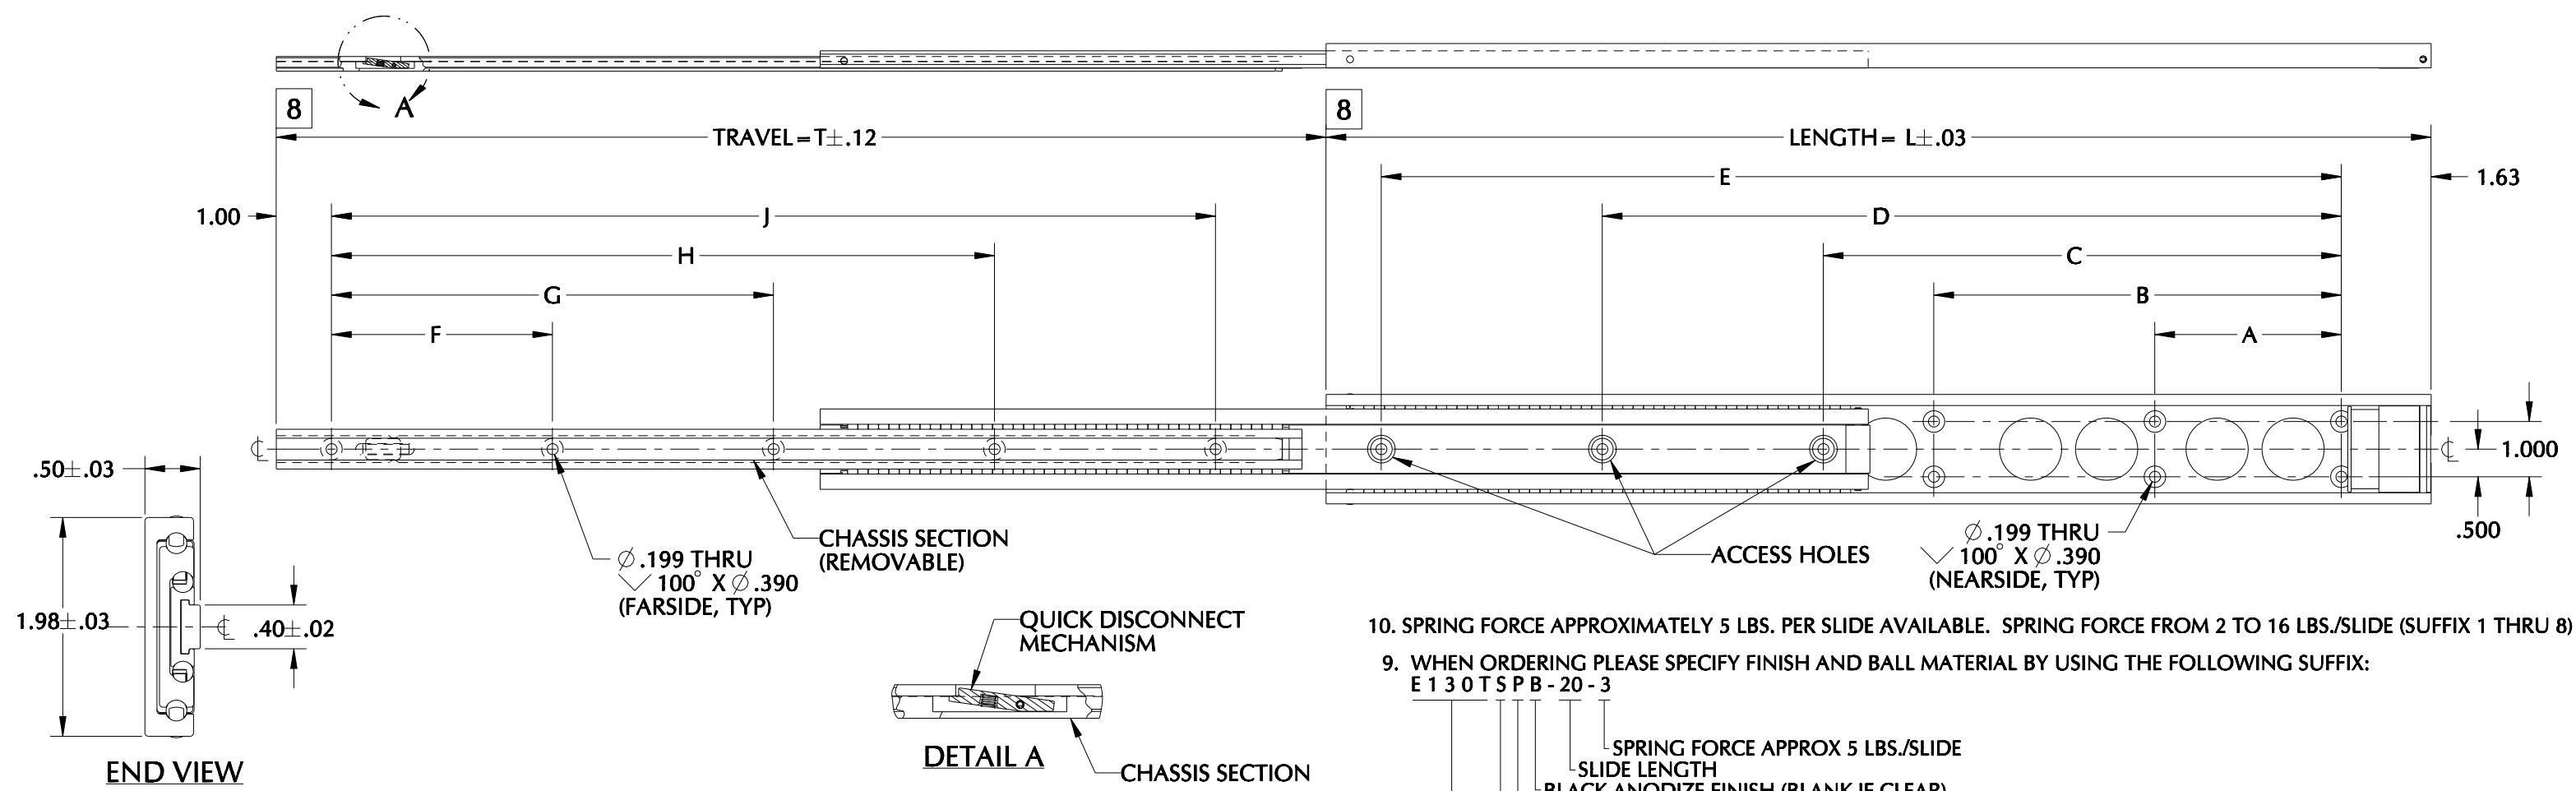

- 10. SPRING FORCE APPROXIMATELY 5 LBS. PER SLIDE AVAILABLE. SPRING FORCE FROM 2 TO 16 LBS./SLIDE (SUFFIX 1 THRU 8)
- 9. WHEN ORDERING PLEASE SPECIFY FINISH AND BALL MATERIAL BY USING THE FOLLOWING SUFFIX:
E 1 3 0 T S P B - 20 - 3

E: SLIDE MODEL/SERIES
 1: SPRING OPEN DEVICE
 2: POLYMER BALL BEARINGS (BLANK IF CRES BALL BEARINGS)
 3: BLACK ANODIZE FINISH (BLANK IF CLEAR)
 4: SLIDE LENGTH
 5: SPRING FORCE APPROX 5 LBS./SLIDE

- 8. THESE SURFACES MUST ALIGN WHEN IS IN THE CLOSED POSITION FOR PROPER SLIDE FUNCTION.
- 7. HOLES OTHER THAN THOSE SHOWN MAY BE IN THE SLIDE AT JONATHAN OPTION.
- 6. CUSHIONED CLOSED STOP.
- 5. USE #10 X 100° FLAT HEAD MACHINE SCREWS FOR MOUNTING SLIDE MEMBERS
- 4. SLIDE IS PROVIDED WITH A SPRING-OPEN AND QUICK DISCONNECT OF CHASSIS SECTION.
- 3. SLIDE IS SYMMETRICAL AND MAY BE USED AS LEFT HAND OR RIGHT HAND MOUNTING UNIT.
- 2. FINISH: SLIDE CHANNELS AND ALUMINUM COMPONENTS ARE ANODIZED PER MIL-A-8625, TYPE II, CLASS 1 (CLEAR) OR TYPE II, CLASS 2 (BLACK, ADD B TO PN). CRES COMPONENTS ARE PASSIVATED PER SAE-AMS-2700.
- 1. MATERIAL: SLIDE CHANNELS ARE FABRICATED FROM HIGH STRENGTH ALUMINUM ALLOYS WITH TENSILE STRENGTH OF 35,000 PSI MIN. (PER ASTM B221), COMPONENT PARTS ARE STAINLESS STEEL AND HIGH STRENGTH ALUMINUM. BALL BEARINGS ARE 440 CRES OR POLYMER (ADD P TO PN). BUMPER IS SANTO PRENE (T.P.E.), SPRING-OPEN MECHANISM IS NYLON AND SPRING ARE STAINLESS STEEL.

PART NO.	SLIDE LENGTH	SLIDE TRAVEL	MOUNTING HOLE PATTERN									LOAD RATING PER PAIR (LBS)	SLIDE WEIGHT (LBS)
			CABINET SECTION					CHASSIS SECTION					
			A	B	C	D	E	F	G	H	J		
E130TSXX-10-3	10.00	10.00	2.375	-	-	4.375	7.375	3.000	-	-	6.000	160	.82
E130TSXX-11-3	11.00	11.00	2.375	-	-	5.375	8.375	3.000	-	-	7.000	160	.89
E130TSXX-12-3	12.00	12.00	2.375	-	-	6.375	9.375	3.000	-	-	8.000	165	.96
E130TSXX-13-3	13.00	13.00	4.375	-	-	7.375	10.375	3.000	6.000	-	9.000	165	1.03
E130TSXX-14-3	14.00	14.00	4.375	-	-	8.375	11.375	3.000	7.000	-	10.000	165	1.10
E130TSXX-15-3	15.00	15.00	4.375	-	-	9.375	12.375	3.000	8.000	-	11.000	170	1.17
E130TSXX-16-3	16.00	16.00	4.375	-	7.375	10.375	13.375	3.000	6.000	9.000	12.000	175	1.25
E130TSXX-17-3	17.00	17.00	4.375	-	8.375	11.375	14.375	3.000	6.000	10.000	13.000	175	1.31
E130TSXX-18-3	18.00	18.00	4.375	-	9.375	12.375	15.375	3.000	6.000	11.000	14.000	175	1.38
E130TSXX-19-3	19.00	19.00	4.375	-	10.375	13.375	16.375	3.000	6.000	12.000	15.000	170	1.45
E130TSXX-20-3	20.00	20.00	3.375	7.375	9.375	13.375	17.375	4.000	8.000	12.000	16.000	170	1.52
E130TSXX-21-3	21.00	21.00	3.375	7.375	10.375	14.375	18.375	4.000	8.000	12.000	16.000	170	1.59
E130TSXX-22-3	22.00	22.00	3.375	7.375	11.375	15.375	19.375	4.000	8.000	13.000	17.000	165	1.66
E130TSXX-23-3	23.00	23.00	3.375	7.375	12.375	16.375	20.375	4.000	8.000	14.000	18.000	165	1.72
E130TSXX-24-3	24.00	24.00	4.375	9.375	13.375	17.375	21.375	4.000	8.000	15.000	19.000	160	1.80
E130TSXX-25-3	25.00	25.00	4.375	9.375	14.375	18.375	22.375	4.000	8.000	16.000	20.000	160	1.86
E130TSXX-26-3	26.00	26.00	4.375	9.375	13.375	18.375	23.375	5.000	10.000	16.000	21.000	160	1.93
E130TSXX-27-3	27.00	27.00	4.375	9.375	14.375	19.375	24.375	5.000	10.000	17.000	22.000	160	2.00
E130TSXX-28-3	28.00	28.00	4.375	9.375	15.375	20.375	25.375	5.000	10.000	18.000	23.000	155	2.07
E130TSXX-29-3	29.00	29.00	4.375	9.375	16.375	21.375	26.375	5.000	10.000	19.000	24.000	155	2.15
E130TSXX-30-3	30.00	30.00	5.375	11.375	15.375	21.375	27.375	6.000	12.000	18.000	24.000	150	2.21
E130TSXX-31-3	31.00	31.00	5.375	11.375	16.375	22.375	28.375	6.000	12.000	19.000	25.000	150	2.28
E130TSXX-32-3	32.00	32.00	5.375	11.375	17.375	23.375	29.375	6.000	12.000	20.000	26.000	150	2.35
E130TSXX-33-3	33.00	33.00	5.375	11.375	18.375	24.375	30.375	6.000	12.000	21.000	27.000	140	2.43
E130TSXX-34-3	34.00	34.00	6.375	13.375	17.375	24.375	31.375	7.000	14.000	21.000	28.000	140	2.50
E130TSXX-35-3	35.00	35.00	6.375	13.375	18.375	25.375	32.375	7.000	14.000	22.000	29.000	130	2.56
E130TSXX-36-3	36.00	36.00	6.375	13.375	19.375	26.375	33.375	7.000	14.000	23.000	30.000	130	2.63

JONATHAN
Engineered Solutions

Irvine Technology Center
410 Exchange, Suite 200
Irvine, CA 92602
Tel. (714) 665-4400
Fax: (714) 368-7002
Website: www.jonathanengr.com
Engineer - Production - Integration/ Subassembly - Logistics
United States - Mexico - China - Taiwan

TOLERANCES UNLESS OTHERWISE NOTED				PART NUMBER : E130TS		DESCRIPTION : ALUMINUM E130TS	
.XX	.XXX	ANGLES	HOLES	DATE : 05/01/13		LOAD RATING : 130-175 LBS.	
± .01	± .005	± 1°	± .005	SHEET 1 OF 1		COPYRIGHT © 2012 JONATHAN ENGINEERED SOLUTIONS	