

1

2

3

4

5

A

A

B

B

C


C

D

D

E

E

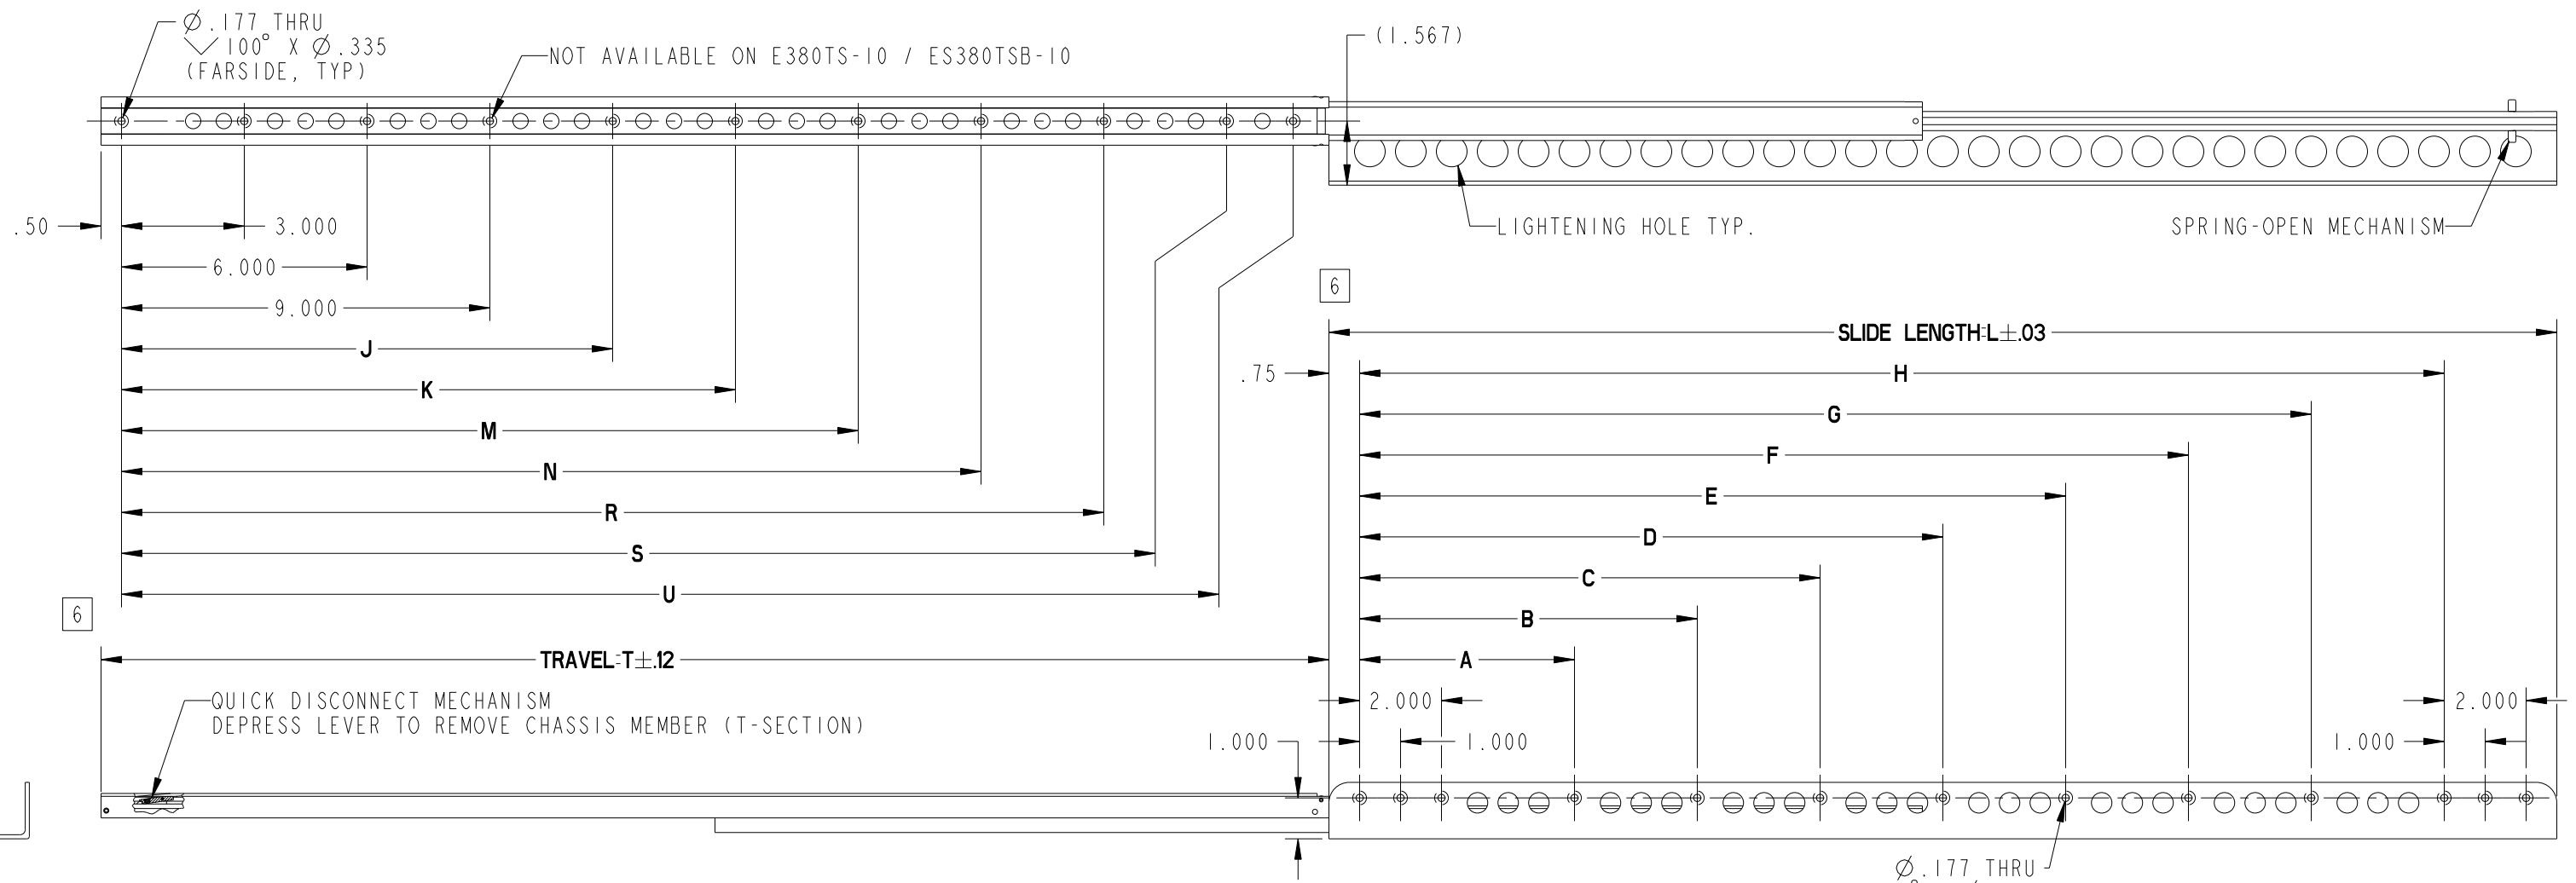


- 6 THESE SURFACES ALIGN WHEN SLIDE IS IN THE CLOSED POSITION.
- 5. USE #8 X 100° FLAT HEAD MACHINE SCREWS FOR MOUNTING THRU SLIDE MEMBERS.
- 4. SLIDE FEATURES QUICK DISCONNECT OF CHASSIS SECTION AND A SPRING-OPEN.
- 3. RIGHT HAND SHOWN, LEFT HAND OPPOSITE.
- 2. FINISH: CHANNELS ARE ANODIZED PER MIL-A-8625 TYPE II, CLASS 2, COLOR: BLACK OR TYPE II, CLASS I (CLEAR). CRES PARTS ARE PASSIVATED PER SAE-AMS-2700.
- 1. MATERIALS: SLIDE CHANNELS ARE FABRICATED FROM HIGH STRENGTH ALUMINUM ALLOYS COMPONENT PART ARE FABRICATED FROM HIGH STRENGTH ALUMINUM ALLOYS AND CORROSION RESISTANT STEEL. BALLS ARE 440 CRES OR ACETAL. BUMPER IS SANTOPRENE (T.P.E.) REAR STOP BUMPER IS NEOPRENE 80A.

- 7. SPRING FORCE APPROXIMATELY 3 LBS PER SLIDE.
- 8. WHEN ORDERING PLEASE SPECIFY SLIDE FINISH, BALL BEARING MATERIAL, SPRING FORCE AND INDICATE -L FOR LEFT HAND SLIDE, -R FOR RIGHT HAND SLIDE OR -P FOR A PAIR OF SLIDES AS SHOWN BELOW:

E S 3 8 0 T S P B - 2 0 - 3 - P

- PAIR OF SLIDES
- SPRING FORCE APPROX. 3 LBS/SLIDE
- SLIDE LENGTH
- SLIDE FINISH BLACK ANODIZE FINISH (BLANK IF CLEAR ANODIZE)
- POLYMER BALL BEARINGS (BLANK IF CRES BALL BEARINGS)
- SLIDE SERIES PART NUMBER

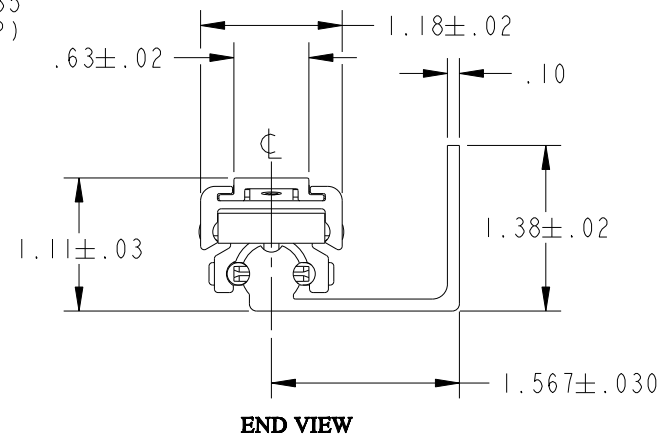

SERIES PART NUMBER	SLIDE LENGTH	SLIDE TRAVEL	MOUNTING HOLE PATTERN															LOAD RATING (LBS) PER PAIR	SLIDE WEIGHT CRES BALLS (LBS)	SLIDE WEIGHT ACETAL BALLS (LBS)
			CABINET SECTION								CHASSIS SECTION									
SERIES	L	T	A	B	C	D	E	F	G	H	J	K	M	N	R	S	U			
ES380TS	10.00	10.00	-	-	-	4.250	-	-	-	6.500	-	-	-	-	-	-	8.625	1.11	0.97	
ES380TS	12.00	12.00	-	-	3.250	5.250	7.250	-	-	8.500	-	-	-	-	-	-	10.625	1.33	1.17	
ES380TS	14.00	14.00	-	-	3.250	6.250	9.250	-	-	10.500	-	-	-	-	-	-	12.625	1.55	1.36	
ES380TS	16.00	16.00	-	-	4.250	7.250	10.250	-	-	12.500	12.000	-	-	-	-	-	14.625	1.78	1.56	
ES380TS	18.00	18.00	-	-	5.250	8.250	11.250	-	-	14.500	12.000	15.000	-	-	-	-	16.250	2.00	1.75	
ES380TS	20.00	20.00	-	3.250	6.250	9.250	12.250	15.250	-	16.500	12.000	15.000	-	-	-	-	18.625	2.22	1.95	
ES380TS	22.00	22.00	-	4.250	7.250	10.250	13.250	16.250	-	18.500	12.000	15.000	18.000	-	-	-	20.625	2.44	2.15	
ES380TS	24.00	24.00	-	5.250	8.250	11.250	14.250	17.250	-	20.00	12.000	15.000	18.000	21.000	-	-	22.625	2.67	2.34	
ES380TS	26.00	26.00	3.250	6.250	9.250	12.250	15.250	18.250	21.250	22.500	12.000	15.000	18.000	21.000	-	-	24.625	2.89	2.53	
ES380TS	28.00	28.00	4.250	7.250	10.250	13.250	16.250	19.250	22.250	24.500	12.000	15.000	18.000	21.000	24.000	-	26.625	3.11	2.73	
ES380TS	30.00	30.00	5.250	8.250	11.250	14.250	17.250	20.250	23.250	26.500	12.000	15.000	18.000	21.000	24.000	27.000	28.625	3.34	2.92	



Irvine Technology Center
 410 Exchange, Suite 200
 Irvine, CA 92602
 Tel. (714) 665-4400
 Fax: (714) 368-7002
 Website: www.jonathanengr.com
 Engineer - Production - Integration/ Subassembly - Logistics
 United States - Mexico - China - Taiwan

TOLERANCES UNLESS OTHERWISE NOTED				PART NUMBER : ES380TS		DESCRIPTION : ALUMINUM EXECUTIVE SERIES ES380TS
.XX	.XXX	ANGLES	HOLES	DATE : 06/12/14		
± .01	± .005	± 1°	± .005	COPYRIGHT © 2012 JONATHAN ENGINEERED SOLUTIONS		

1

2

3

4

5