



NOTES:


1. SLIDE IS SYMMETRICAL. MAY BE USED AS LEFT OR RIGHT HAND SLIDE.
2. HOLES OTHER THAN SHOWN MAY BE IN THE SLIDE MEMBERS AT JONATHAN OPTION.
3. INNER MEMBER IS NOT REMOVABLE.
4. USE NUMBER 8 PAN OR BINDING HEAD SCREWS FOR MOUNTING THRU THE SLIDE MEMBERS.
5. SLIDE IS SUITABLE AS UNDERMOUNT
(LOAD RATING CAPACITY 80% LESS)



ISOMETRIC REPRESENTATION



END VIEW

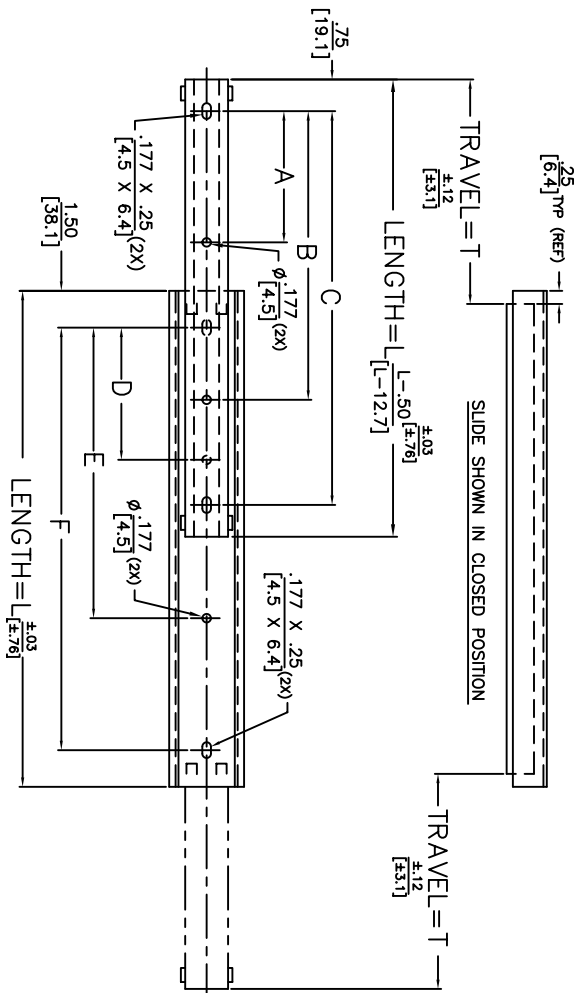

PART NO.	SLIDE LENGTH	SLIDE TRAVEL	MOUNTING HOLE PATTERN						LOAD RATING
SERIES	DIM.	DIM.	INNER CHANNEL			OUTER CHANNEL			PER PAIR
LENGTH	L	T	A	B	C	D	E	F	
320TW-12	12	8.00	3.250	6.750	10.00	3.000	6.000	9.00	72 LBS
	304.8	203	82.55	171.45	254.0	76.20	152.40	228.6	33 KG
320TW-14	14	10.00	4.000	8.000	12.00	3.500	7.500	11.00	67 LBS
	355.6	254	101.60	203.20	304.8	88.90	190.50	279.4	31 KG
320TW-16	16	11.25	4.500	9.500	14.00	4.250	8.750	13.00	88 LBS
	406.4	286	114.30	241.30	355.6	107.95	222.25	330.2	40 KG
320TW-18	18	12.50	5.250	10.750	16.00	5.000	10.000	15.00	81 LBS
	457.2	318	133.35	273.05	406.4	127.00	254.00	381.0	37 KG
320TW-20	20	13.75	6.000	12.000	18.00	5.500	11.500	17.00	75 LBS
	508	349	152.40	304.80	457.2	139.70	292.10	431.8	34 KG
320TW-22	22	15.00	6.500	13.500	20.00	6.250	12.750	19.00	68 LBS
	558.8	381	165.10	342.90	508.0	158.75	323.85	482.6	31 KG
320TW-24	24	16.25	7.250	14.750	22.00	7.000	14.000	21.00	87 LBS
	609.6	413	184.15	374.65	558.8	177.80	355.60	533.4	40 KG
320TW-26	26	17.50	8.000	16.000	24.00	7.500	15.500	23.00	81 LBS
	660.4	445	203.20	406.40	609.6	190.50	393.70	584.2	37 KG
320TW-28	28	18.75	8.500	17.500	26.00	8.250	16.750	25.00	85 LBS
	711.2	476	215.90	444.50	660.4	209.55	425.45	635.0	39 KG



Irvine Technology Center
410 Exchange, Suite 200
Irvine, CA 92602
Tel: (714) 665-4400
Website: www.jonathanengr.com
Engineering•Production•Integration/Subassembly•Logistics
United States • Mexico • China • Taiwan

DIMENSIONS SHOWN		PART NO.	DESCRIPTION:
AS:	IN.		
	[MM]	320TW	STEEL
TOLERANCE			SERIES 320TW
UNLESS OTHERWISE NOTED			LOAD RATING: 67-88 LBS./ 31-40 KG.
.XX	±.020		
.X	±.5	DATE:	6/04
.XXX	±.010		
.XX	±.25		
ANGLES	±1°		