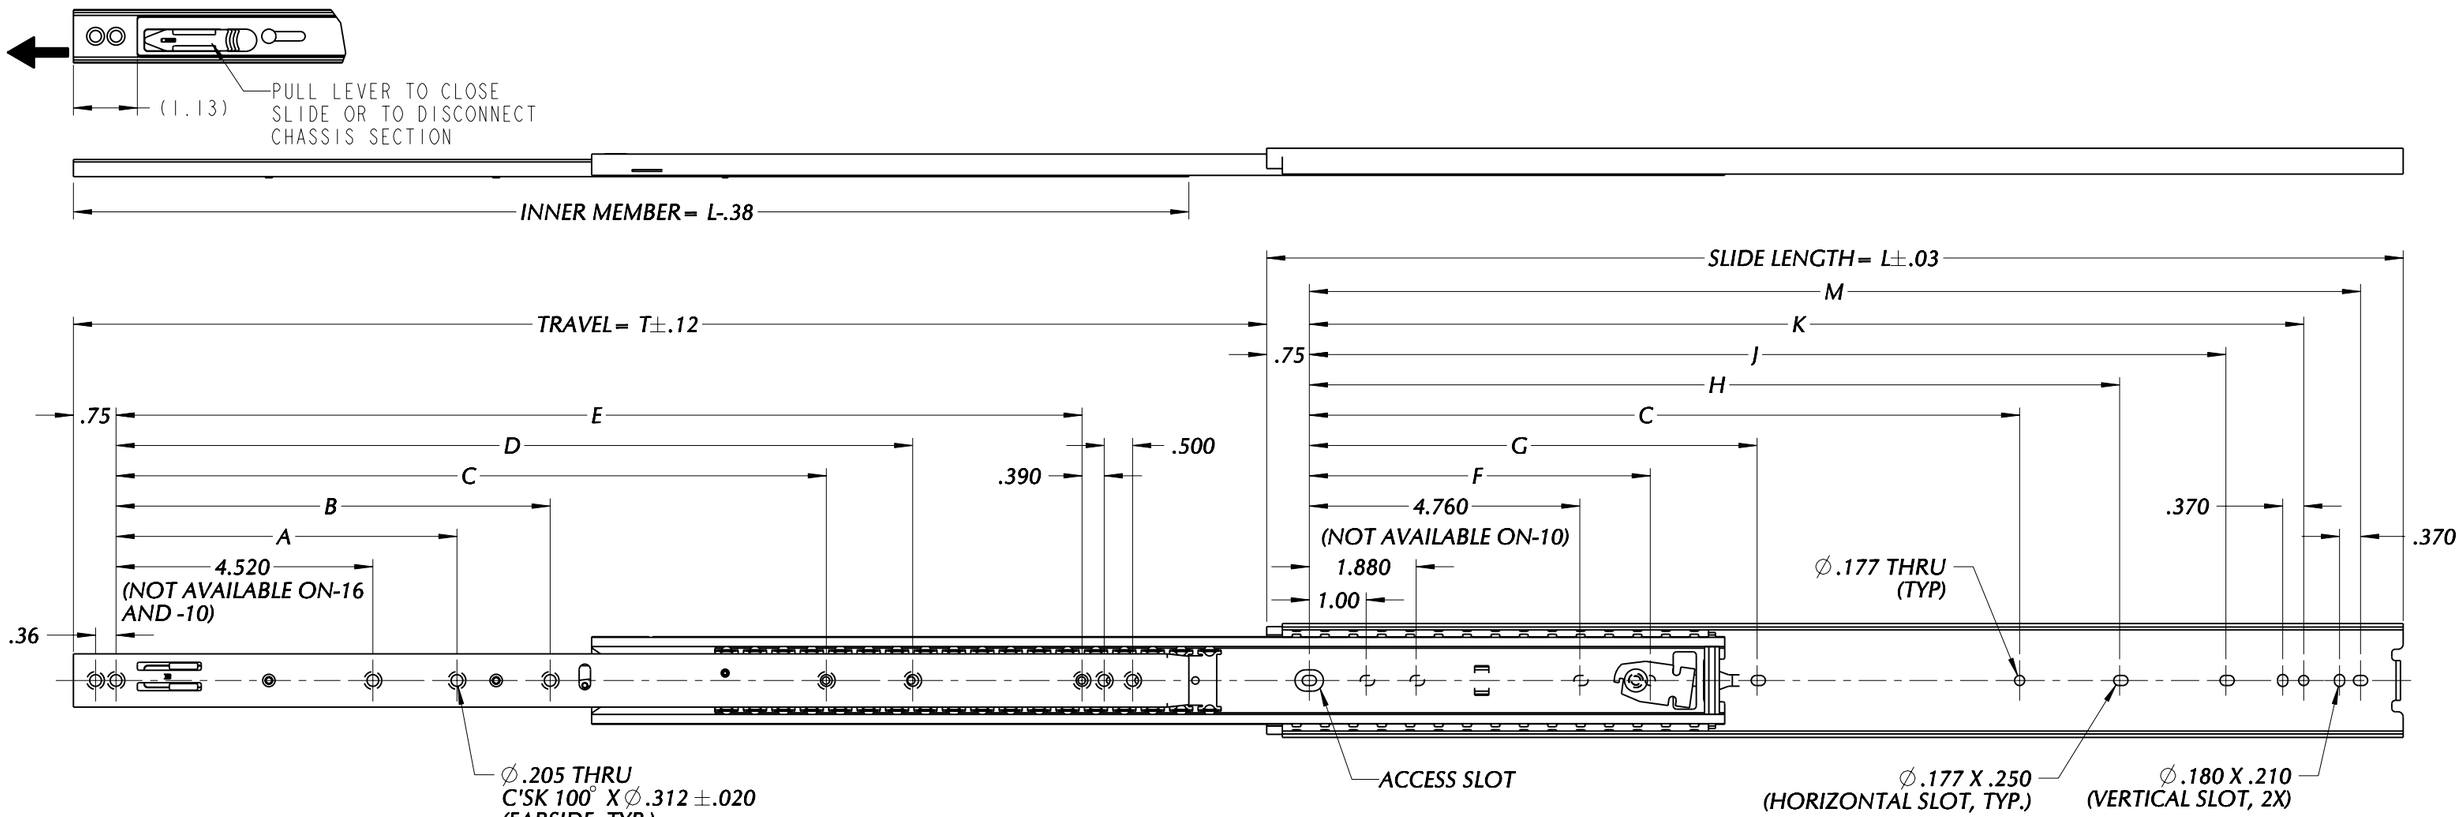

6. CUSHIONED CLOSED POSITION STOP.

5. BALL RETAINER: COLD ROLLED STEEL. BRIDGED FOR TRU-TRACKING.

4. BALL SPACERS: HIGH IMPACT EXTRUDED PLASTIC.

3. LUBRICATION: EXTREME PRESSURE, HI-LOW TEMPERATURE POLYMER GREASE.

2. FINISH: CLEAR ZINC PLATE (ROHS COMPLIANT)

1. MATERIAL: COLD ROLLED STEEL.

11. HOLES OTHER THAN THOSE SHOWN MAY BE ON SLIDE MEMBERS AT JONATHAN'S OPTION

10. USE #8 100° FLAT HEAD MACHINE SCREWS FOR MOUNTING THRU THE INNER MEMBER AND #8 PAN OR BINDING HEAD SCREWS FOR MOUNTING THRU THE OUTER MEMBER

9. SLIDE IS PROVIDED WITH A FRONT LOCK PULL RELEASE MECHANISM

8. SLIDE IS SYMMETRICAL; MAY BE USED AS A LEFT OR RIGHT HAND SLIDE.

7. SLIDE IS PROVIDED WITH LOCK OPEN AND QUICK DISCONNECT OF CHASSIS SECTION.

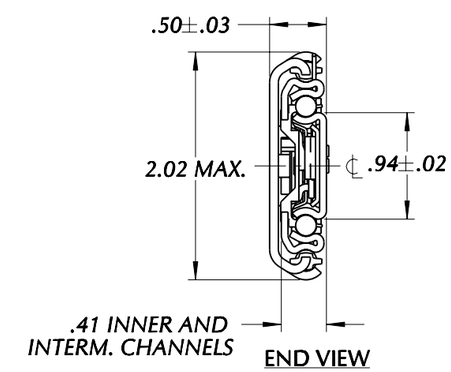

PART NO.	SLIDE LENGTH	SLIDE TRAVEL	MOUNTING HOLE PATTERN											LOAD RATING - PER PAIR
SERIES - LENGTH	L	T	A	B	C	D	E	F	G	H	J	K	M	
370PQD-10	10.00	11.00	-	3.625	7.390	7.890	-	-	-	-	6.130	7.500	8.500	150 LBS/ 68 KG
370PQD-12	12.00	13.00	3.000	–	-	-	9.000	-	-	-	9.130	9.500	10.500	150 LBS/ 68 KG
370PQD-14	14.00	15.00	4.000	–	-	-	11.000	4.000	-	-	10.130	11.500	12.500	148 LBS/ 67 KG
370PQD-16	16.00	17.00	4.500	–	-	-	13.000	5.000	-	-	12.130	13.500	14.500	147 LBS/ 67 KG
370PQD-18	18.00	19.00	5.500	6.640	11.500	12.020	15.000	5.500	-	12.260	14.130	15.500	16.500	146 LBS/ 66 KG
370PQD-20	20.00	21.00	6.000	7.640	12.500	14.020	17.000	6.000	7.640	14.260	16.130	17.500	18.500	145 LBS/ 66 KG
370PQD-22	22.00	23.00	7.000	8.640	14.000	16.020	19.000	7.000	8.640	16.260	18.130	19.500	20.500	140 LBS/ 64 KG
370PQD-24	24.00	25.00	7.500	9.640	15.000	18.020	21.000	7.500	9.640	18.260	20.130	21.500	22.500	135 LBS/ 61 KG
370PQD-26	26.00	27.00	8.000	11.640	16.500	20.020	23.000	8.000	10.640	20.260	22.130	23.500	24.500	127 LBS/ 58 KG
370PQD-28	28.00	29.00	9.000	11.640	18.000	22.020	25.000	9.000	11.640	22.260	24.130	25.500	26.500	120 LBS/ 54 KG
370PQD-30	30.00	31.00	9.500	12.640	19.000	24.020	27.000	9.500	12.640	24.260	26.130	27.500	28.500	112 LBS/ 51 KG

JONATHAN® Engineered Solutions

Irvine Technology Center
410 Exchange, Suite 200
Irvine, CA 92602
Tel. (714) 665-4400
Fax: (714) 368-7002
Website: www.jonathanengr.com
Engineer - Production - Integration/ Subassembly - Logistics
United States - Mexico - China - Taiwan

TOLERANCES UNLESS OTHERWISE NOTED

.XX	.XXX	ANGLES	HOLES
± .03	± .010	± 1°	± .005

PART NUMBER : 370PQD

DATE : 09/25/14

DESCRIPTION :

COLD ROLLED STEEL
SERIES 370PQD
LOAD RATING : 112-150

SHEET 1 OF 1

COPYRIGHT © 2012 JONATHAN ENGINEERED SOLUTIONS