


ORDERING INFORMATION:


THE STANDARD 320 LM SLIDE IS IDENTIFIED BY SPECIFYING THE LENGTH OF OUTER AND INNER MEMBERS.

EXAMPLE: 320L-28-6 DESCRIBES A 320 LINEAR MOTION SLIDE WITH AN OUTER MEMBER 28 INCHES LONG CONTAINING AN INNER MEMBER 6 INCHES LONG PROVIDING A TRAVEL OF 22 INCHES. THE TRAVEL IS COORDINATE OF THE OUTER AND INNER MEMBER LENGTHS.


1. SLIDE IS SYMMETRICAL, MAY BE USED AS LEFT OR RIGHT HAND SLIDE.
2. HOLES OTHER THAN SHOWN MAY BE IN THE SLIDE MEMBERS AT JONAHAN OPTION.
3. INNER MEMBER IS REMOVABLE.
4. THE INNER MEMBER IS ALWAYS SUPPORTED ON BOTH BEAMS AND PROVIDES PRECISE LINEAR AND ROTATIONAL ADJUSTABLE FRICTION THROUGHOUT THE FULL TRAVEL.
5. USE NUTS & PINS OR PUNCHING HEAD SCREWS FOR MOUNTING THRU THE SLIDE MEMBERS.
6. SLIDE IS SUITABLE AS UNDERMOUNT
(LOAD RATING CAPACITY 80% LESS)



ISOMETRIC REPRESENTATION

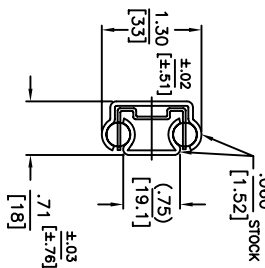

END VIEW

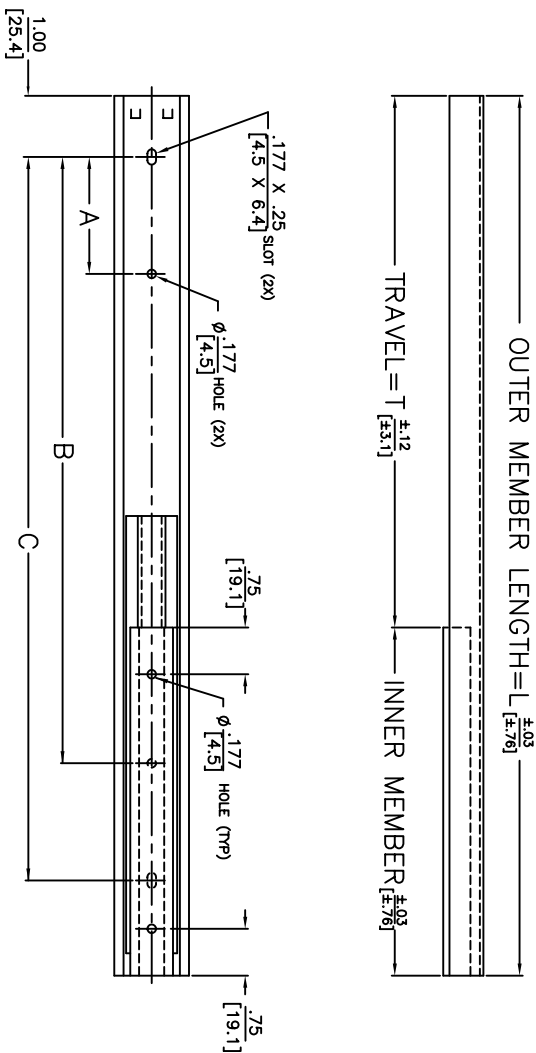

OUTER MEMBER LENGTH	INNER MEMBER LENGTH							OUTER CHANNEL MOUNTING HOLES		
	3.00	4.00	5.00	6.00	7.00	8.00	A	B	C	
	76.2	101.6	127.0	152.4	177.8	203.2				
L	TRAVEL									
12	9	8	7	6	5	4			9.500	
304.8	228.6	203.2	177.8	152.4	127	101.6			241.30	
14	11	10	9	8	7	6	2.000	9.500	11.500	
355.6	279.4	254	228.6	203.2	177.8	152.4	50.80	241.30	292.10	
16	13	12	11	10	9	8	3.000	11.000	13.500	
406.4	330.2	304.8	279.4	254	228.6	203.2	76.20	279.40	342.90	
18	15	14	13	12	11	10	4.000	12.000	15.500	
457.2	381	355.6	330.2	304.8	279.4	254	101.60	304.80	383.70	
20	17	16	15	14	13	12	5.500	12.500	17.500	
508	431.8	406.4	381.0	355.6	330.2	304.8	139.70	317.50	444.50	
22	19	18	17	16	15	14	6.000	14.000	19.500	
558.8	482.6	457.2	431.8	406.4	381	355.6	152.40	355.60	495.30	
24	21	20	19	18	17	16	7.000	15.000	21.500	
609.6	533.4	508	482.6	457.2	431.8	406.4	177.80	381.00	546.10	
26	23	22	21	20	19	18	8.500	15.500	23.500	
660.4	584.2	558.8	533.4	508	482.6	457.2	215.90	393.70	556.90	
28	25	24	23	22	21	20	9.000	17.000	25.500	
711.2	635	609.6	584.2	558.8	533.4	508	228.60	431.80	647.70	



Jonathan®
Engineered Solutions

Irvine Technology Center
 410 Exchange, Suite 200
 Irvine, CA 92602
 Tel: (714) 665-4400
 Website: www.JonathanEngr.com
 Engineering • Production • Integration / Subassembly • Logistics
 United States • Mexico • China • Taiwan

DIMENSIONS SHOWN		PART NO.	DESCRIPTION:
AS:	$\frac{\text{IN.}}{\text{MM}}$		
TOLERANCE _____ UNLESS OTHERWISE NOTED		320LM STEEL SERIES 320LM	
$\frac{XX}{XX}$	$\pm .020$		
$\frac{.XXX}{XX}$	$\pm .5$		
$\frac{.XXX}{XX}$	$\pm .010$		
$\frac{XX}{XX}$	$\pm .25$		
DATE: 6/04			
ANGLES $\pm 1^\circ$		COPYRIGHT © 2004 JONATHAN ENGINEERED SOLUTIONS	